


TOSHIBA

Leading Innovation >>>


The background is a deep blue with a subtle, abstract pattern. On the right side, there is a faint, large clock face with numbers 2, 4, 5, 7, 8, 11, and 14 visible. On the left side, there is a white, stylized illustration of a building or a multi-story structure with a grid-like pattern, set within a transparent rectangular frame.

SPACEL-UNI


TOSHIBA MACHINE-ROOM-LESS ELEVATORS
Installation plan and power facility plan for *Indonesia*

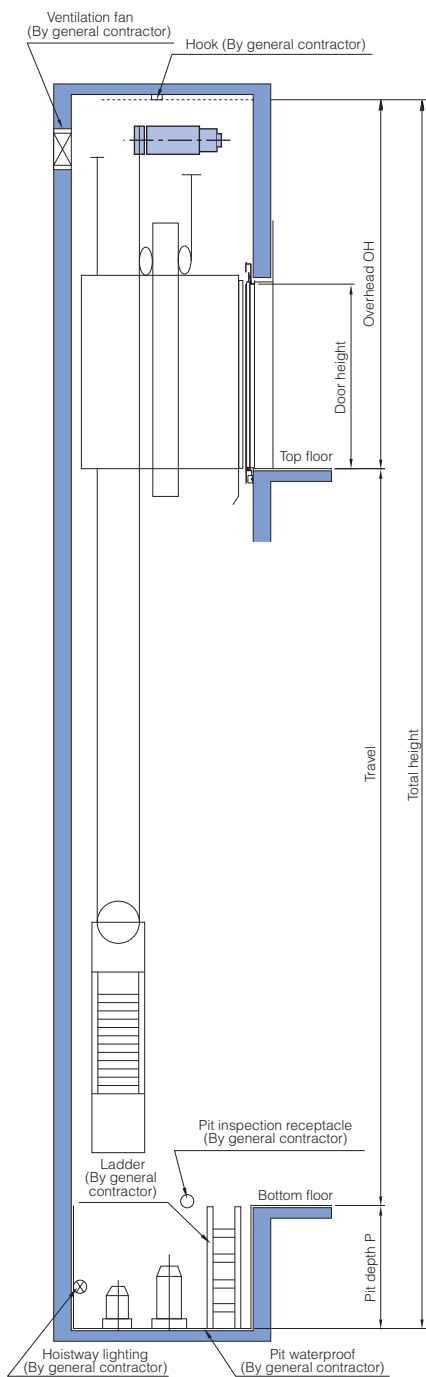

Hoistway section

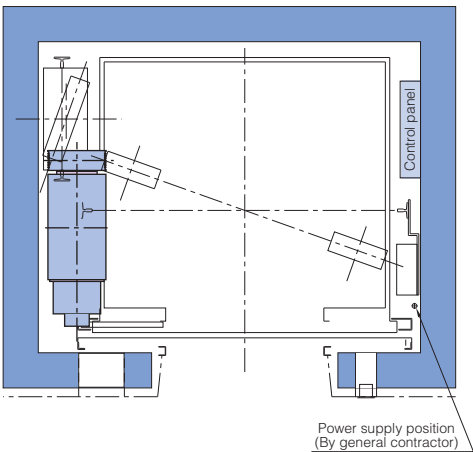

Topmost floor hoistway plan

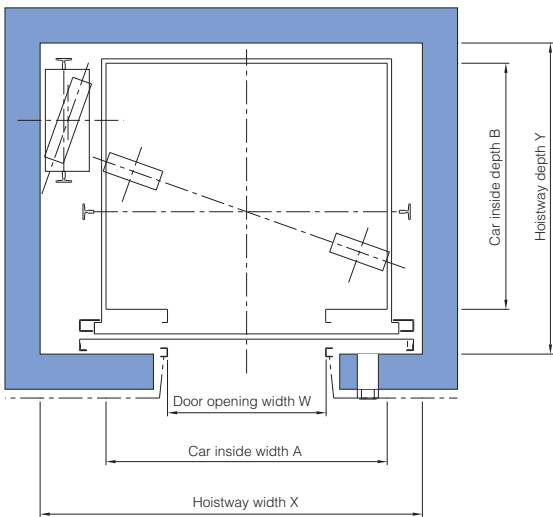


Typical floor hoistway plan

Specifications


Type		Nos. of Person	Capacity (kg)	Speed (m/s)	Cage size (mm)	Door width W (mm)	Hoistway size (mm)			Motor capacity (kw)	Max. service stops (s)	Max. travel (m)							
					Internal (A x B)		X x Y	OH	P										
P8-CO60	D	8	550	1	1100×1400	800	1820×1770	4045	1300	3.6	24	60							
	D					900	2000×1770												
P8-CO96	D			1.6		800	1820×1770	4150	1400				5.8	32	80				
	D					900	2000×1770												
P8-CO105	D			1.75		800	1820×1770	4200	1450							6.3	32	80	
	D					900	2000×1770												
P11-CO60	W	11	750	1	1350×1400	800	1945×1770	4045	1300	4.6	24	60							
	W					900	2050×1770												
P11-CO96	W			1.6		800	1945×1770	4150	1400				7.3	32	80				
	W					900	2050×1770												
P11-CO105	W			1.75		800	1945×1770	4200	1450							8.0	32	80	
	W					900	2050×1770												
P11-CO60	D	11	750	1	1100×1700	800	1820×2070	4045	1300	4.6	24	60							
	D					900	2000×2070												
P11-CO96	D			1.6		800	1820×2070	4150	1400				7.3	32	80				
	D					900	2000×2070												
P11-CO105	D			1.75		800	1820×2070	4200	1450							8.0	32	80	
	D					900	2000×2070												
P13-CO60	W	13	900	1	1600×1400	900	2190×1770	4045	1300	5.7	24	60							
	W					1000	2275×1770												
	W					1100	2400×1770												
P13-CO96	W			1.6		900	2190×1770	4150	1400		9.2	32	80						
	W					1000	2275×1770												
	W					1100	2400×1770												
P13-CO105	W			1.75		900	2190×1770	4200	1450					10.0	32	80			
	W					1000	2275×1770												
	W					1100	2400×1770												
P14-CO60	D	14	950	1	1100×2100	800	1820×2470	4045	1300	5.7							24	60	
	D					900	2000×2470												
P14-CO96	D			1.6		800	1820×2470	4150	1400								9.2	32	80
	D					900	2000×2470												
P14-CO105	D			1.75		800	1820×2470	4200	1450		10.0	32	80						
	D					900	2000×2470												

Note:


- Hoistway dimensions are the minimum dimension after the building work.
- Hoistway dimensions are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables not related to elevator are prohibited inside the hoistway.
- OH value in the chart is not related the elevator for standard cars, As for the non-standard cars, additional consultation should be carried out.
- If the size of the hoistway is greater than above sizes, OH will be larger, please contact us.
- If the location of Power source panel, Control panel and Electric power supply are changed, please contact us.
- When travel is 40m or more, and 150mm to above mentioned dimension at the OH dimension and TC dimension.
- Example: P13W W: Wide car D: Deep car

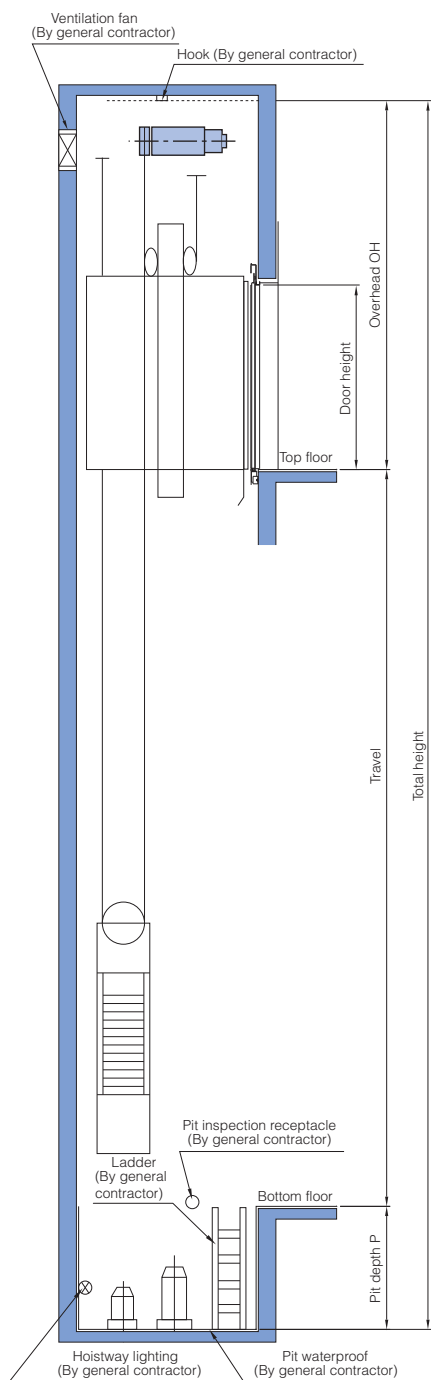


Hoistway section

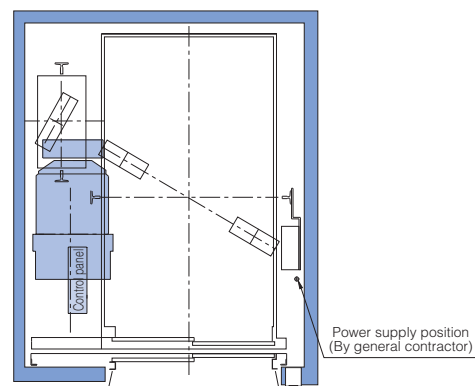

Top floor hoistway plan

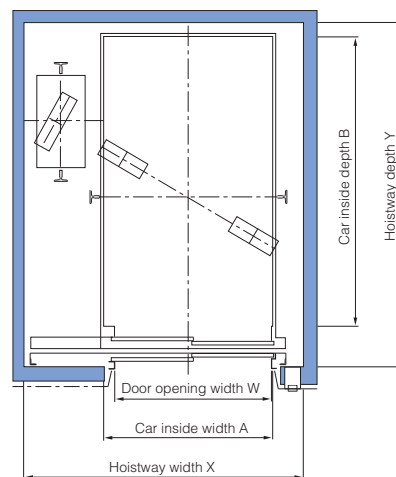

Two panel slide opening door
hoistway plan
(Type P17D, P21D)

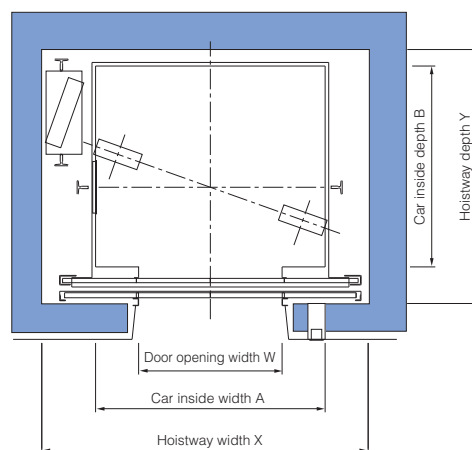


Center opening door
hoistway plan
(Type P15W)

Specifications


Type		Nos. of Person	Capacity (kg)	Speed (m/s)	Cage size (mm)	Door width W (mm)	Hoistway size (mm)			Motor capacity (kw)	Max. service stops (s)	Max. travel (m)
					Internal (A x B)		X x Y	OH	P			
P17-CO60	W	17	1150	1	1800×1500	1000	2450×2080	4000	1400	7.3	32	80
	W			1		1100	2550×2080	4000	1400	7.3		
P17-CO96	W			1.6		1000	2450×2080	4150	1550	11.6		
	W			1.6		1100	2550×2080	4150	1550	11.6		
P17-CO105	W			1.75		1000	2450×2080	4250	1650	12.6		
	W			1.75		1100	2550×2080	4250	1650	12.6		
P18-2S60	D	18	1275	1	1200×2500	1100	2100×3050	4300	1450	8.7	32	80
P18-2S96	D			1.6				4500	1550	14.0		
P18-2S105	D			1.75				4500	1650	16.0		
P23-2S60	D	23	1600	1	1400×2600	1200	2400×3150	4300	1450	10.0	32	80
P23-2S96	D			1.6				4500	1550	16.0		
P23-2S105	D			1.75				4500	1650	18.0		

Note:


- Hoistway dimensions are the minimum dimension after the building work.
- Hoistway dimensions are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables not related to elevator are prohibited inside the hoistway.
- OH value in the chart is not related the elevator for standard cars, As for the non-standard cars, additional consultation should be carried out.
- If the size of the hoistway is greater than above sizes, OH will be larger, please contact us.
- If the location of Power source panel, Control panel and Electric power supply are changed, please contact us.
- When travel is 40m or more, and 150mm to above mentioned dimension at the OH dimension and TC dimension.
- Example: P15W W: Wide car D: Deep car

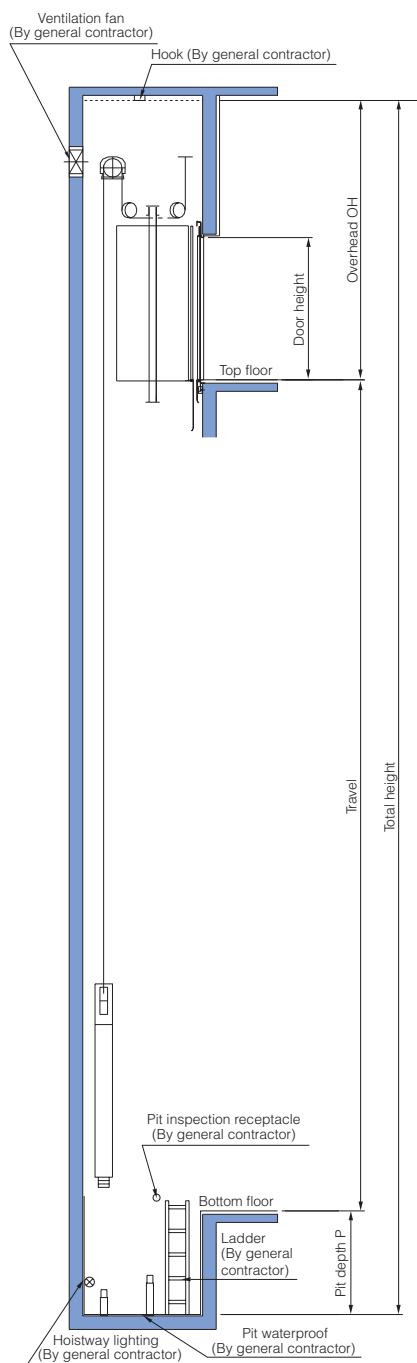

Hoistway section

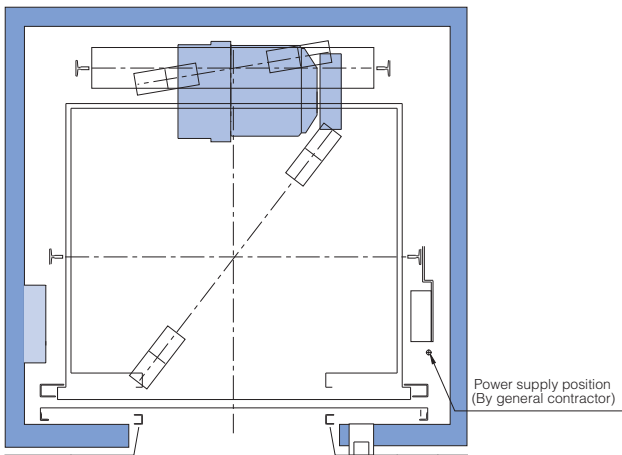

Top floor hoistway plan

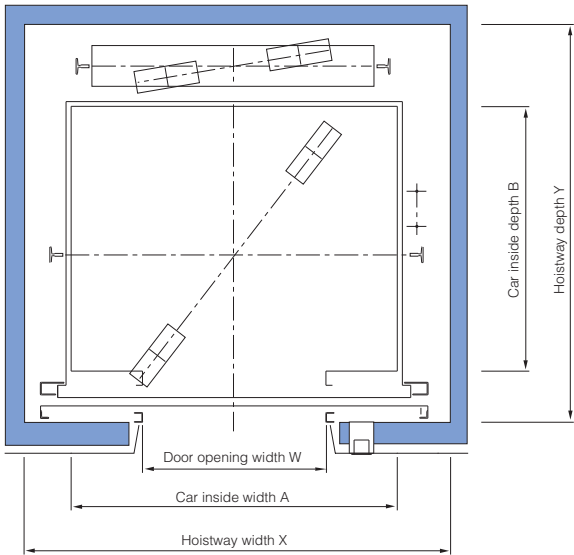


Typical floor hoistway plan

Specifications


Type		Nos.of Person	Capacity (kg)	Speed (m/s)	Cage size (mm)	Door width W (mm)	Hoistway size (mm)			Motor capacity (kw)	Max. service stops (s)	Max. travel (m)
					Internal (A x B)		X x Y	OH	P			
P18-2S60	W	18	1275	1	2000×1500	1100	2700×2400	4150	1450	8.7	32	80
P18-2S96	W			1.6				4350	1550	14.0		
P18-2S105	W			1.75				4350	1650	16.0		
P19-CO60	W	19	1350	1	2000×1550	1100	2700×2450	4150	1450	8.7	32	80
P19-CO96	W			1.6				4350	1550	14.0		
P19-CO105	W			1.75				4350	1650	16.0		
P23-CO60	W	23	1600	1	2000×1800	1100	2700×2700	4100	1450	10.0	32	80
	W					1200	2740×2700	4300				
P23-CO96	W			1.6		1100	2700×2700	4300	1550	16.0		
	W					1200	2740×2700	4450				
P23-CO105	W			1.75		1100	2700×2700	4350	1650	18.0		
	W					1200	2740×2700	4550				
P26-CO60	W	26	1800	1	2100×1900	1200	2840×2800	4300	1450	12.0	32	80
P26-CO96	W			1.6				4450	1550	18.0		
P26-CO105	W			1.75				4550	1650	20.0		

Note:


- Hoistway dimensions are the minimum dimension after the building work.
- Hoistway dimensions are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables not related to elevator are prohibited inside the hoistway.
- OH value in the chart is not related the elevator for standard cars, As for the non-standard cars, additional consultation should be carried out.
- If the size of the hoistway is greater than above sizes, OH will be larger, please contact us.
- If the location of Power source panel, Control panel and Electric power supply are changed, please contact us.
- It is necessary for this type of elevator to install RC structure or steel beam structure for supporting the machine beam in the top of the hoistway by building work. For the details, please contact us.
- When travel is 40m or more, and 150mm to above mentioned dimension at the OH dimension and TC dimension.
- Example: P17W W: Wide car

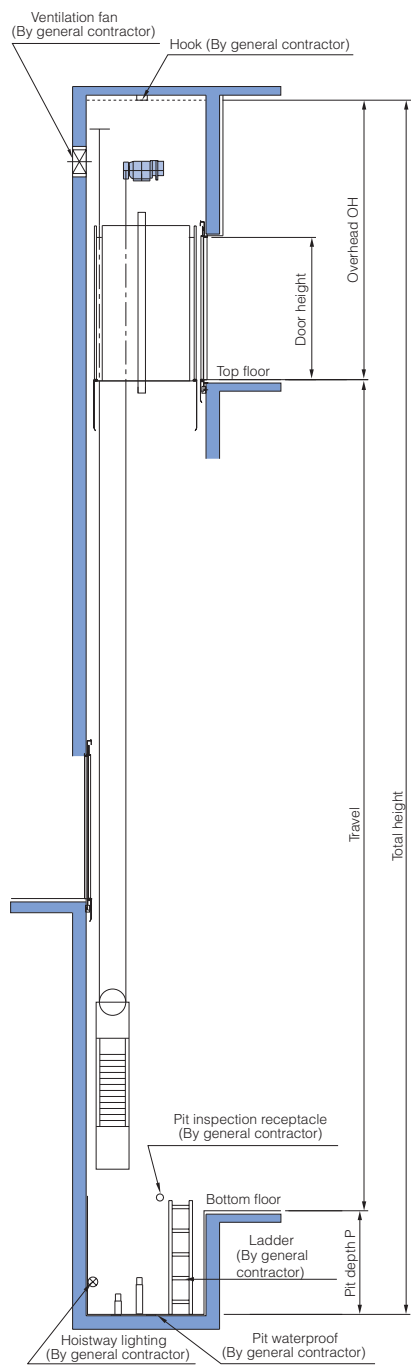

Hoistway section

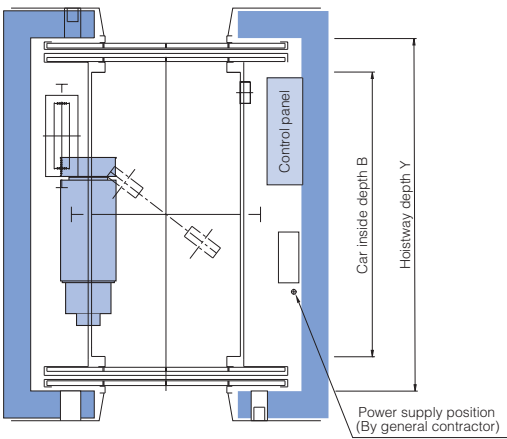

Top floor hoistway plan

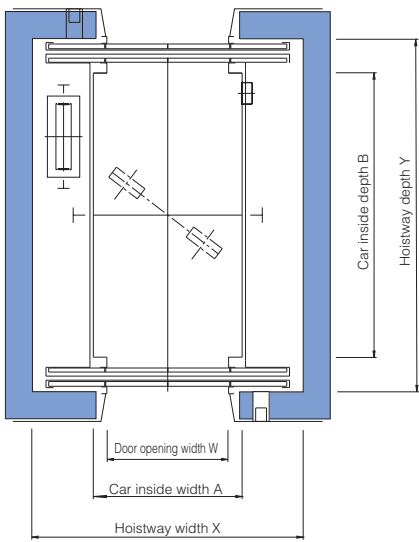

Typical floor hoistway plan

Front and rear opening
hoistway plan
(Type: P13D2)


Specifications

Type	Nos. of Person	Capacity (kg)	Speed (m/s)	Cage size (mm)	Door width W (mm)	Hoistway size (mm)			Motor capacity (kw)	Max. service stops (s)	Max. travel (m)
				Internal (A x B)		X x Y	OH	P			
P14-CO60	D2	14	950	1	1100×2100	800	1820×2610	4045	1300	5.7	※1
P14-CO96	D2							4150	1400	9.2	
P14-CO105	D2							4200	1450	10.0	
P23-2S60	D2	23	1600	1	1400×2600	1200	2400×3270	4300	1450	10.0	※1
P23-2S96	D2							4500	1550	16.0	
P23-2S105	D2							4500	1650	18.0	


※ 1: Please contact us.

Note:

- Hoistway dimensions are the minimum dimension after the building work.
- Hoistway dimensions are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables not related to elevator are prohibited inside the hoistway.
- OH value in the chart is not related the elevator for standard cars, As for the non-standard cars, additional consultation should be carried out.
- If the size of the hoistway is greater than above sizes, OH will be larger, please contact us.
- If the location of Power source panel, Control panel and Electric power supply are changed, please contact us.
- When travel is 40m or more, and 150mm to above mentioned dimension at the OH dimension and TC dimension.
- Example: P13D2 D2: Front and rear opening door deep car

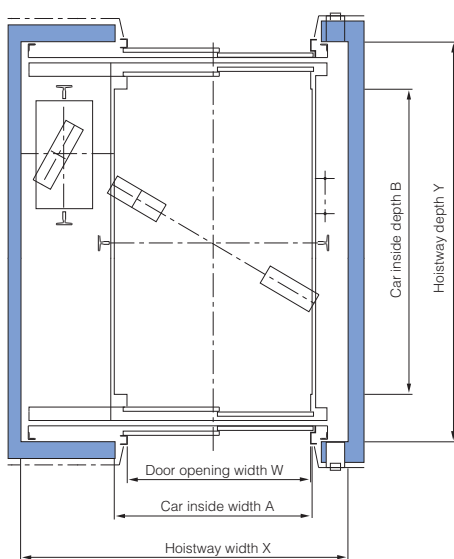

Typical floor hoistway plan

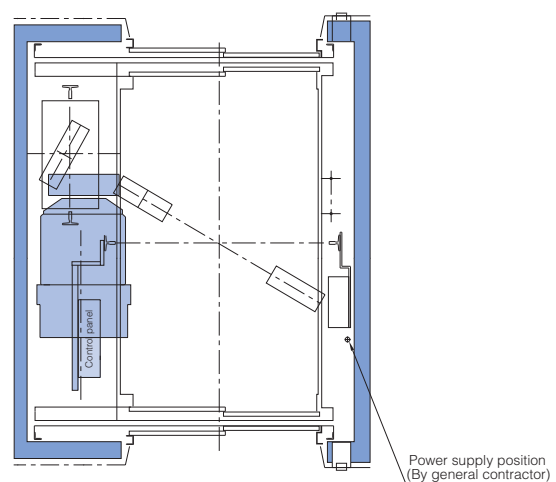

Top floor hoistway plan

Front and rear opening
hoistway plan
(Type: P21D2)

Global network

Together with our global partners, we will connect with Asia and then the world, through our technology and our spirit.
The planet is our shared heritage. We must live together, grow together and delight in one another.

TOSHIBA ELEVATOR (SHENYANG) CO.,LTD.

Head Office: No.5 Feiyun Road Hunnan New District Shenyang, The People's Republic of China



TOSHIBA ELEVATOR (CHINA) CO.,LTD.

Head Office: No. 685 Wen Chuan Road, Baoshan District, Shanghai 201901, The People's Republic of China.



MS ELEVATORS Sdn. Bhd.

Head Office: 8th Floor Wisma Penang Garden, 42 Jalan Sultan Ahmad Shah, 10050 Penang, Malaysia.

Factory: 2530, Lorong Perusahaan 10, Prai Industrial Estate, 13600 Prai, Province, Wellesley, Malaysia.



MS ELEVATORS ENGINEERING Sdn. Bhd.

Head Office: 8th Floor Wisma Penang Garden, 42 Jalan Sultan Ahmad Shah, 10050 Penang Malaysia.

KL Office: Wisma MS, No.15, Jalan 2/116 D, Kuchai Entrepreneurs' Park, Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia.

CHEVALIER HONGKONG LTD.

Head Office: 22nd F.L. 8Wang Hoi Road Kowloon Bay Hong Kong

CHEVALIER SINGAPORE HOLDINGS PTE LTD.

Head Office: CHEVALIER HOUSE. 23 Genting Road #07-01/02 349681 Singapore

TOSHIBA ELEVATOR KOREA INC.

Head Office: 11th Fl., Jae-neung Bldg., 192-11, Euljiro1-Ga,
Chung-Gu, Seoul 100-191, the Republic of Korea



TOSHIBA ELEVATOR PRODUCTS CORPORATION

Head Office: 1000, Hamada, Amiboshi Ward, Himeji City, Hyogo Prefecture
671-1242 Japan



Uenohara Operations

Head Office: 8154-10 Uenohara Uenohara City, Yamanashi
409-0112 Japan

Fuchu Factory

Head Office: 1 Toshiba-cho Fuchu City, Tokyo
183-8511 Japan



TOSHIBA ELEVATOR AND BUILDING SYSTEMS CORPORATION

Head office: 5-27, Kitashinagawa 6-chome, Shinagawa-ku, Tokyo 141-0001 Japan
PHONE: +81-3-5423-3389 FAX: +81-3-5423-2746

<http://www.toshiba-elevator.co.jp>



Safety Cautions

- Observance of relevant laws / regulations are required.
- Read the entire "Instruction Manual" carefully before use, for important information about safety, handling and operation.

TOSHIBA

TOSHIBA ELEVATOR AND BUILDING SYSTEMS CORPORATION

5-27, Kitashinagawa 6-chome, Shinagawa-ku,
Tokyo 141-0001 Japan
PHONE: +81-3-5423-3389 FAX: +81-3-5423-2746

- The data given in this catalog are subject to change without notice.