#### **3rd Edition**

For GB standard

\* Revised publication effective Jun. 2023

**Safety Cautions** 

- Observance of relevant laws / regulations are required.
- Read the entire "Instruction Manual" carefully before use, for important information about safety, handling and operation.

#### **TOSHIBA**

Toshiba Elevator and Building Systems Corporation

72-34, Horikawa-cho, Saiwai-ku, Kawasaki 212-8585, Japan

Please enter the contents from the "Inquiry Input Form" in website. https://www.toshiba-elevator.co.jp/elv/infoeng/

GK-F211(3)-2306-500-2306(TD)

## **TOSHIBA**

Toshiba Compact Machine Room Elevators Standard Passenger Elevator

**ELCOSMO-III** 

For GB standard

<sup>-</sup> The data given in this catalog are subject to change without notice.

# THE SOLUTIONS

#### **COMPANY SOLUTIONS**

Toshiba Elevator and Building Systems Corporation has built a framework which encompasses all aspects from system development to production, sales to marketing, installation, adjustment, maintenance and services in order to provide clients with the highest quality products and services.

Utilizing the comprehensive technological infrastructure developed by Toshiba Group in more than 140 years since its foundation, we aim to enhance the leading edge technology and quality that we used to develop the ultra high speed elevator, harnessing Toshiba's technological innovations to their fullest extent. To meet clients' expectations and requirements for safe and pleasant elevators as well as constantly pursuing further innovation and improvement. Furthermore, we are aiming to strengthen system development, production, enhancing sales channel and sales partnership to expand in the global market.

## **CONCEPT of ELCOSMO-**III

Toshiba manufactures elevators by applying the latest technology and improved elevator development skills. ELCOSMO-III, the most recent high-end compact machine room elevator, which incorporates various technologies to save energy and time, contributes to global environment.

#### **■ Product Line-up**

Expanded the applicable speed of the ELCOSMO-III.
We can comply with various needs such as building use, layout design, etc.

Scope of specification	Range of application
Passenger	8 ~ 30 persons
Rated load	630 ∼ 2250 kg
Rated speed	1.0 ~ 4.0 m/s

Note1: Applicable range of rated speed 3.5 or 4.0m/s are rated load 825 or 1050kg only. Note2: Applicable range of rated load 2250kg ar rated speed 2.0m/s or less.


Note3: The above scope complies with GR758R: 2003 standard

Juu			9,	,		<b>J</b> ,					
	4.0										
	3.5										
	3.0										
Rated	2.5										
speed (m/s)	2.0				L	CO	SM	0-			
()	1.75										
	1.5/1.6										
	1.0										
Rated lo	oad (kg)	630	825	1050	1150	1275	1350	1600	1800	2000	2250
Ту	ре	P8	P11	P14	P15	P17	P18	P21	P24	P26	P30

#### Contents

The Solutions
Company Solutions F
Concept of ELCOSMO-III
Technology
New Technology ····· F
Safety Function F
Energy Saving & Environment F
Expansion of variations
in car ceiling designP.
Car Design
OFFICEP.
RESIDENCEP.
HOTELP.
SHOPP.2
Hall Design
Hall Decoration Item VariationP.2
Operation SystemsP.:
Functions P.
Hoistway Layout/ SpecificationsP.
Works by Others P.O.
Global NetworkP

## **TECHNOLOGY**

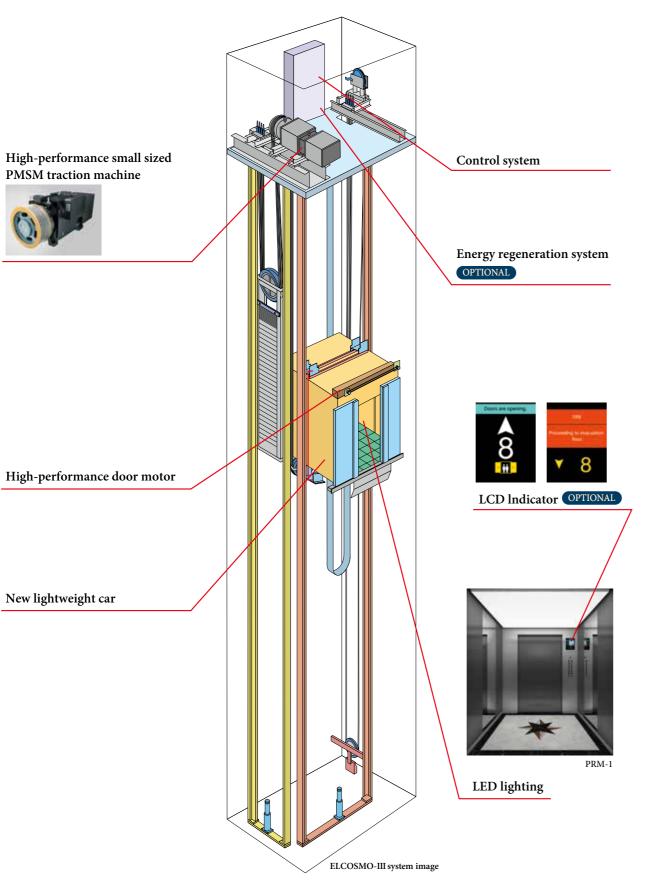

## **New Technology**

#### High-performance Small Sized PMSM Traction Machine

- ◆ Compact PMSM (Permanent Magnet Synchronous Motor) for space saving.
- ♦ Over 30% less power consumption (compared to conventional electric motor).
- ◆ Gearless traction without gear oil for low vibration, low noise and better environmental conservation.




#### High Performance Control Systems

A high performance CPU is adopted for control systems. This control system enables to reduce standby electricity, automatic shutoff system for lightings and ventilation to contribute furthermore reduction of electricity.

#### Energy Regeneration System OPTIONAL

An energy regeneration device feeds energy back to the power grid while the traction machine is under power generation to achieve high-efficiency energy utilization, which results in over 38% energy conservation (with the assumption of 1050kg, 1.75m/s, 12-hour operation per day, 25 days per month).

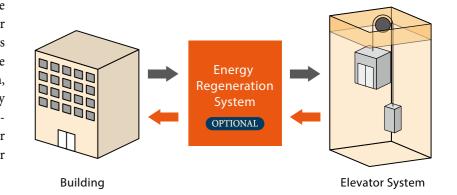


#### Use of Roller Guide OPTIONAL

A roller guide is used instead of a conventional sliding guide shoe. Features include:

- ◆ Comfort: Using the successful vibration damping solution from the high-end elevator type, riding comfort is further improved after roller guide is mounted on the car.
- ♦ High efficiency: Visible improvement of the mechanical efficiency with lower friction and energy consumption.
- ◆ Environmental conservation: Lubrication oil and lubrication unit are eliminated and replaced by a long-life rubber roller to reduce environmental pollution.



The actual product colors may vary slightly from those printed colors in this catalog.

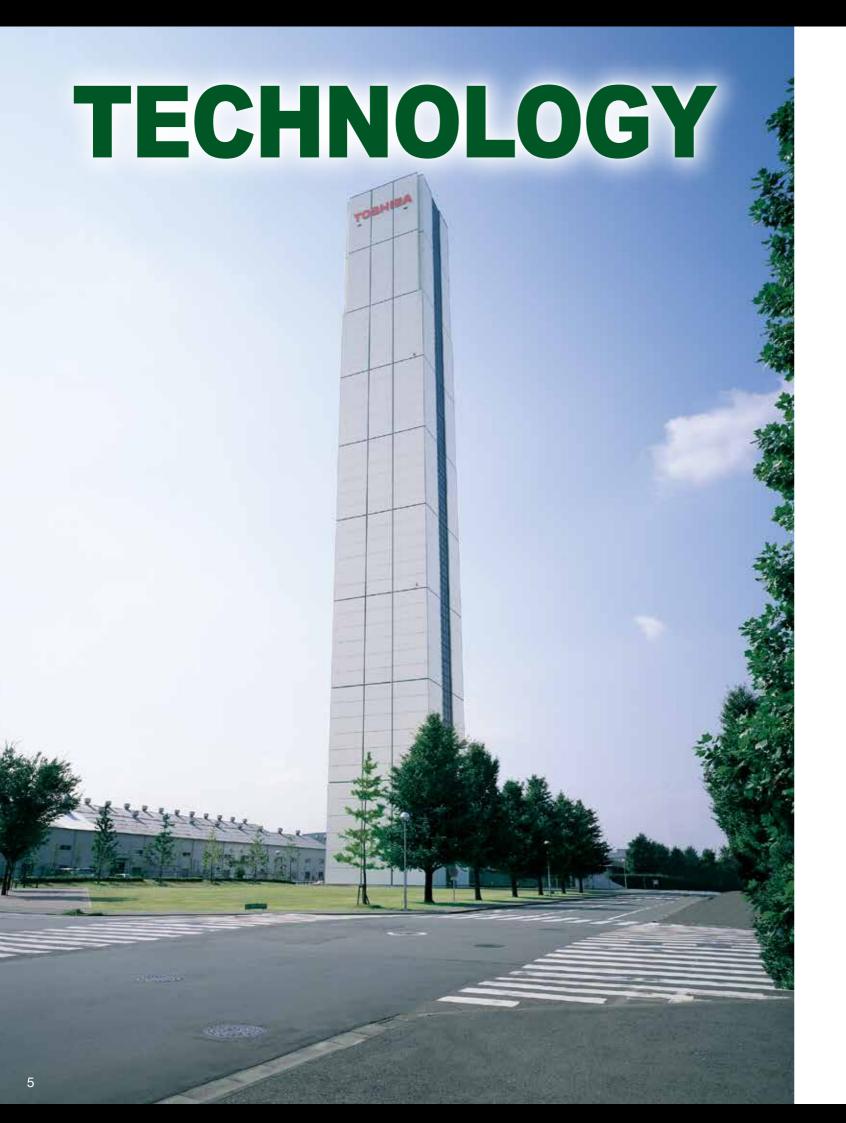

## **Safety Function**

#### Unintended Car Movement Protection OPTIONAL

A traction drive elevator shall include means to prevent uncontrolled movement of the elevator away from the landing with neither the landing nor the car doors in the locked position. The Elevator shall detect uncontrolled movement of the car away from the landing and stop no more than 1200mm after as measured from the landing floor sill. Before operation, the uncontrolled car movement protection system means for an ascending elevator, the clearance between the landing door floor sill and the apron of the stopped elevator shall not exceed 200mm. In additional, uncontrolled movement protection means the horizontal distance between the sill or entrance frame of the stopped elevator and the wall of the well, from the landing floor sill to 1200mm downward for a descending elevator.

#### Car Door Lock OPTIONAL

Every car door shall be mechanically locked by at least 7mm such that it can only be opened in the unlocking zone of a landing. The lift operation shall automechanically depend on the locking of the car door. This locking shall be proved by an electrical safety device to confirm the horizontal distance between the well wall and the sill or entrance frame of the car is within 150 mm.

#### **Ascending Car Overspeed Protection**


A device to prevent an elevator ascending to the elevator shaft top beyond the rated speed due to a device like an electromagnetic brake or control unit. It monitors the speed of the upper direction mechanically by a governor, then cut off the power supply and safety circuit by an overspeed detecting switch when the speed exceeds the rated speed more than 1.3 times. The elevator shall be stopped by triggering the double brake when overspeed occurred.

## Multi-beam Door Safety

The photoelectric cell detects passengers in the doorway and reopens closing doors.

Full open Full open (Getting on)

\* Image of Multi-beam Door Safety

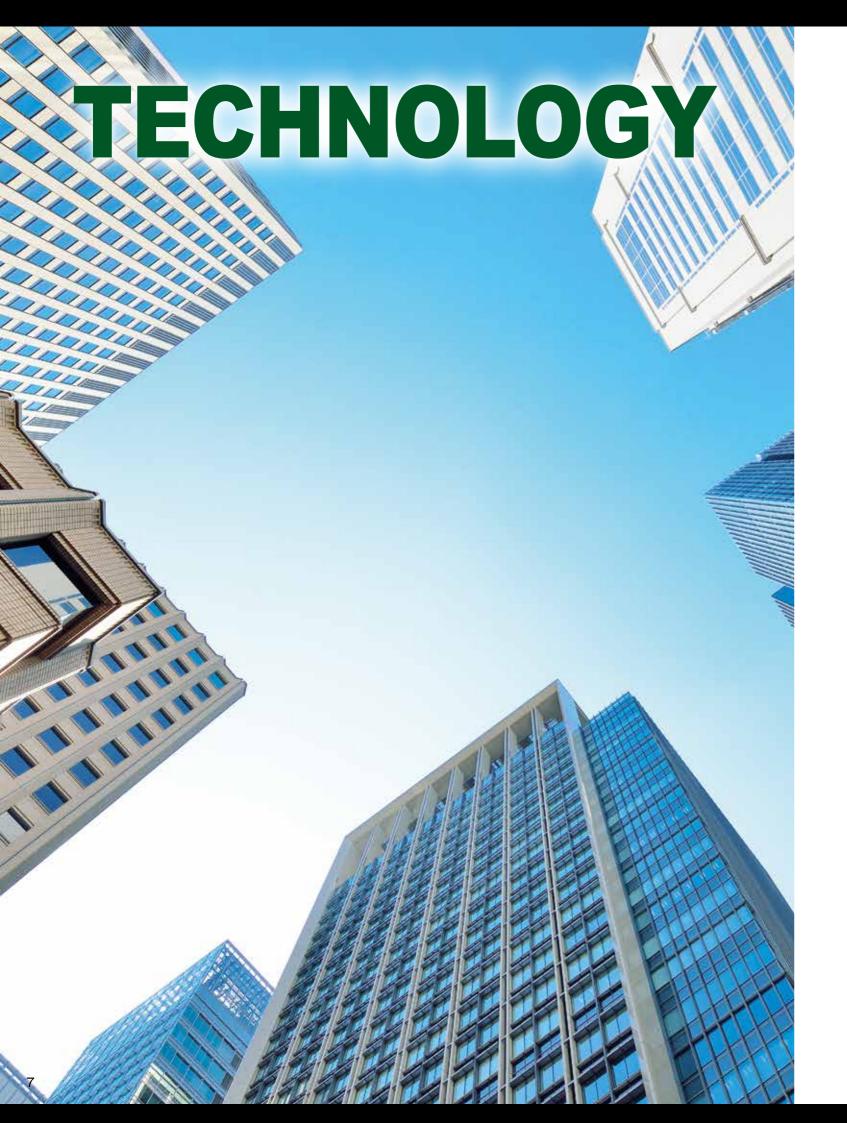

## **Safety Function**

#### Automatic Landing in Power Failure

#### OPTIONAL

In case of a power failure, backup lamps are automatically lighted up in the cars, while the system's operation is switched to the elevator system's own battery powered inverter. Cars stranded between floors are taken to the nearest floor; otherwise, doors are opened and passengers are let out. The doors automatically open in case the car stops at any point that is not between floors but where the doors can be opened. (Note: Overridden by any similar backup or safety systems installed in compliance with safety codes.)

### Earthquake Emergency Operation

#### OPTIONAL

When the system's seismic sensor installed in the elevator shaft detects an S-wave (the secondary seismic wave and the main shock of an earthquake) that exceeds the pre-set threshold, the system takes control with emergency procedures. "Earthquake" emergency signs lighted up in all cars, all cars are taken immediately to the nearest floor, doors are opened and passengers are instructed to alight.

#### Fire Emergency Operation

#### OPTIONAL

This emergency operation is automatically triggered in case of a fire, when a fire alarm button is actuated, or when a Fire/Smoke Detector detects an abnormality. All hall calls and floor selections are cancelled, passengers are informed of the emergency procedure with a "Fire" sign and a voice announcement and all cars are sent directly to the emergency exit floor. Doors open at the emergency floor and passengers are guided to safety.

#### Power failure detected.

0

The elevators sto

0

In each car, the "Power Failure" sign lights up and the in-car PA system instructs passengers with the following message:

"Please get off this elevator as soon as the doors open."

0

The car goes to the nearest floor, and the doors open.

0

After a pre-set period, the doors are closed.

0

Normal operation resumes when power supply is back.

X Above flowchart is representable example

#### Earthquake detected.

A seismic sensor triggers emergency operation.

0

In each car, the "Earthquake" emergency sign lights up and the in-car PA system instructs passengers with the following message: "Please get off this elevator as soon as the doors open."

0

The car goes to the nearest floor and the doors open.

Ω

After a pre-set period, the doors are closed.

 $\ensuremath{\ensuremath{\%}}\xspace Above flow$ chart is representable example

#### FII

0

Fire Alarm is actuated.

In each car, the "Fire" emergency sign lights up and the in-car PA system instructs passengers with the following message:

"Please get off this elevator as soon as the

0

The car goes to the emergency exit floor, the doors open.

0

After a pre-set period, the doors are closed.

\*Above flowchart is representable example

## TECHNOLOGY



## **Energy Saving & Environment**

#### Toshiba Group and the SDGs

The main plank of the "Toshiba Group Basic Commitment" is "Committed to people, Committed to the Future." This expresses Toshiba Elevator and Building Systems is unwavering determination to contribute to the development of society through its business, and is consistent with the direction of the SDGs, which aim to realize a sustainable society. Acting in good faith in our daily activities, and with a passion to make the world a better place, looking to the future beyond the next generation, and to create that future with our stakeholders-inspired by these ideas, Toshiba Elevator and Building Systems has and will continue to bring together the creativity and technological capabilities it has cultivated to confront social issues that are becoming more complicated and serious, and to turn on the promise of a new day.

Note: Toshiba Elevator and Building Systems is working on business activities by extracting 11 items that can be promoted from all 17 types of SDGs goals.

## SUSTAINABLE GALS DEVELOPMENT

























#### Products and functions adopted to reduce power consumption


Suppress power consumption by reducing standby power, commercialization of the regenerative power function, adoption of LED lighting.

#### **LED Lightings**

Under equal brightness, an LED lighting system only consumes 10% of electrical with comparison of an incandescent lamp and 50% of an fluorescent lamp. (part of the ceiling)



PRM-1

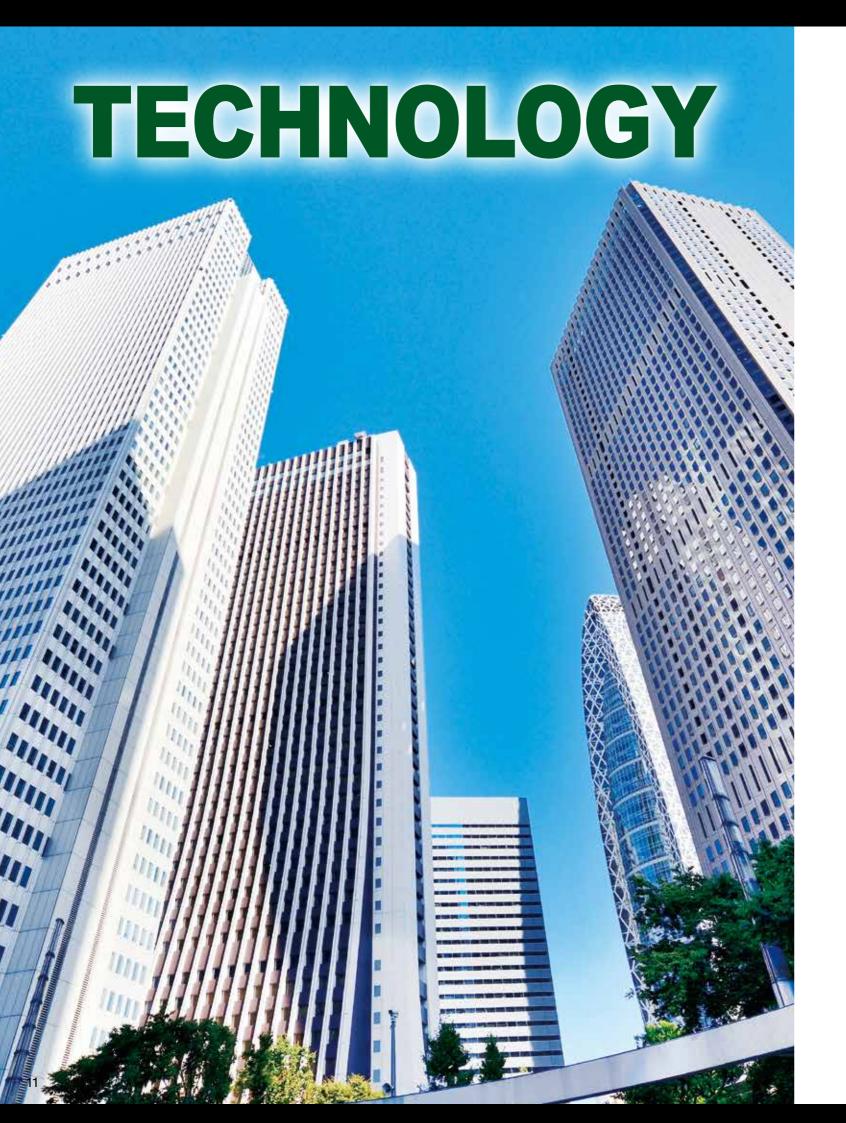

## **Energy Saving & Environment**

#### Providing environmentally conscious products

Toshiba elevator group is promoting the development of environmentally conscious products, which involves environmentally conscious product design, assessing the environmental impact of products and disclosing the environmental performance of products. Products are developed in compliance with the updated voluntary environmental performance standards.

## Product assessment and voluntary environmental standards for products

In developing products, we assess them across their life cycles from manufacturing, logistics and use to disposal and recycling to conduct product development and reduce the environmental impacts on the global environment

Whereas product assessment is used to confirm the minimum necessary environmentally conscious requirements for product development, Voluntary Environmental Standards for Products have been established in the Toshiba elevator group to create highly environmentally friendly products and products complying with the same are released as environmentally conscious products.

#### Reducing hazardous materials

[Reduction of lead use]

By changing the method of tying rope, the use of lead can be eliminated or reduced.

[Employing LED lightings]

By employing LED light, various materials used for light became mercury free.

#### Lead-free Design of Base Plate, RoHS Compliance and Elimination of Specific Chemical Substances (15 Classifications)

Continuous concern over RoHS compliance, eliminating 15 classifications of specific chemical substances and using the lead-free technique for main circuit boards.



## **Expansion of variations in car ceiling design**

Suitable for harmonization of a wide variety for building applications and concepts.

Expanding the lineup of ceiling designs utilizing LED lighting

All ceiling lighting uses LED lighting to take environmental measures such as long life and energy saving.



## OFFICE



## PRM-1

Front view



Back view



Ceiling design	PRM-1 Light shade (Ceiling entire surface)	
Car side panel (Return panel)	Vibration finish stainless steel	
Car side panel (Side panel)	Black color hairline finish stainless stee and Mirror finish stainless steel	
Car side panel (Rear panel)	Black color hairline finish stainless steel and Mirror finish stainless steel	
Kick plate	Hairline finish stainless steel	
Car door	Black color hairline finish stainless steel	
Car floor	Marble (JQ-1013)	
COP	POP-G1L-104C	
Button	KB-3A	
Indicator	10.4 inch Color LCD	
Remark	Applies to models with a capacity of 1150kg or more.	

#### Design variations

The publication of this page is an example of design.

Please refer to the "DESIGN SELECTION" catalog for each the condition and other designs.

PRM-2



TL-S2



OPTIONAL DLC-1



SL-3X



## RESIDENCE

OPTIONAL

## **DLX-27**

Front view



Front side view



Ceiling design	DLX-27 Hairline finish stainless steel (Central part: Mirror finish stainless steel)
Car side panel (Return panel)	Hairline finish stainless steel
Car side panel (Side panel)	Hairline finish stainless steel
Car side panel (Rear panel)	Hairline finish stainless steel
Kick plate	Nil
Car door	Hairline finish stainless steel
Car floor	Vinyl tile (MID809)
COP	POP-G1NL
Button	GS-6A-BT
Indicator	LED segment
НСОР	HCOP-G1D (Button: UB-1)

#### Design variations

The publication of this page is an example of design.

Please refer to the "DESIGN SELECTION" catalog for each the condition and other designs.

DLX-25



TL-1



OPTIONAL DLX-21



SL-P1



The actual product colors may vary slightly from those printed colors in this catalog. Please consult our local distributor before adoption about the material and the color.



## DLX-31

Front view



Back view



Ceiling design	DLX-31 Hairline finish stainless steel
Car side panel (Return panel)	Black color mirorr finish stainless steel
Car side panel (Side panel)	Black color mirorr finish stainless steel and Mirror etching finish stainless steel (DZ-008)
Car side panel (Rear panel)	Black color mirorr finish stainless steel and Mirror etching finish stainless steel (DZ-008)
Kick plate	Nil
Car door	Mirror etching finish stainless steel (DZ-008)
Car floor	Marble (JQ-1012)
COP	POP-G1L-57B
Indicator	5.7 inch Color LCD
Handrail	Nil

#### Design variations

The publication of this page is an example of design. Please refer to the "DESIGN SELECTION" catalog for each the condition and other designs.

DLX-24





DLC-1







OPTIONAL

DLX-22

Front view



Back view



Ceiling design	DLX-22 Hairline finish stainless steel
Car side panel (Return panel)	Vibration finish stainless steel and Mirror finish stainless steel
Car side panel (Side panel)	Vibration finish stainless steel and Mirror finish stainless steel
Car side panel (Rear panel)	Vibration finish stainless steel
Kick plate	Nil
Car door	Mirror finish stainless steel
Car floor	Marble (JQ-1013)
COP	POP-G1L-57B
Button	KB-7B
Indicator	5.7 inch Color LCD

#### Design variations

The publication of this page is an example of design.

Please refer to the "DESIGN SELECTION" catalog for each the condition and other designs.

SL-P1



DLX-28



OPTIONAL DLX-23



OPTIONAL TL-S1





### Hall Decoration Item Variation

The combination of elevator hall equipment and specifications extends design. It can be easily harmonized with the entrance design of the building.











Hall design 6

n 6 Hall design 7

## Hall design 1 OPTIONAL

Hall jamb Wide inclined type

Vibration finish stainless steel

Hall Transon

Vibration finish stainless steel


Hall Door

Vibration finish stainless steel

Hall Indicator / HIB-G1L-43B

Button KB-1A
Hall Lantern HL-G1







Note : In the case of jamb with transom, fire-proof specification cannot be applied to the transom.

The actual product colors may vary slightly from those printed colors in this catalog.

## Hall design 2 OPTIONAL

Hall jamb


Wide inclined type Mirror finish stainless steel


Hall Door Mirror etching finish stainless steel (DZ-018)

HI-G34-O **Hall Indicator** Hall Button HB-G1K KB-1B Button







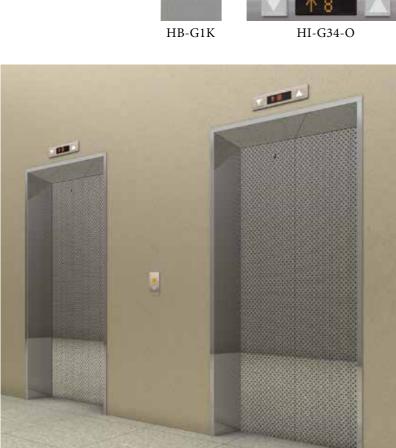



## Hall design 3 OPTIONAL

Hall jamb

Wide inclined type Hairline finish stainless steel

Hall Door Hairline finish stainless steel

Hall Indicator HI-G1 Hall Button HB-G1 Button

Other Hall Emergency Operationg Panel











## Hall design 4 OPTIONAL

Wide inclined type Hairline finish stainless steel Hall Jamb

Hall Door Painted steel panel (77GS)

Hall Indicator / Hall Button

HIB-G1NL-O

Button GS-7B-B









## Hall design 5 OPTIONAL

Hall Jamb

Narow type Hairline finish stainless steel

Hairline etching finish stainless steel (DZ-007) Hall Door

Hall Indicator/ Hall Button HIB-G1N-O

Button NB-1B



HIB-G1N-O





## Hall design 6 STANDARD

Hall Jamb Narow ty

Narow type Painted steel panel (62YS)

Hall Door Painted steel panel (62YS)

Hall Indicator / Hall Button

HIB-G1NL-L-O

**Button** GS-7A-BT







## Hall design 7 OPTIONAL

Hall jamb

Wide inclined type Hairline finish stainless steel

Hall Door

Hairline finish stainless steel

Hall IndicatorHI-G1L-57BHall ButtonHB-G1K











## OPERATION SYSTEMS





## Car Operation Panel: G1NL series

※Note: Applicable to Wide Car type models

POP type



SL-P1



FCOP type






#### Button Line-up

GS-5-B	GS-5A-B	GS-5B-B
СО-2-В	GS-5A-D	G3-3D-D
$\uparrow$		$\bigcirc$
GS-5-BT	GS-5A-BT	GS-5B-BT
1		
GS-5-W	GS-5A-W	GS-5B-W
GS-5-WT	GS-5A-WT	GS-5B-WT
GS-6-B	GS-6A-B	GS-6B-B
1	1	1
GS-6-BT	GS-6A-BT	GS-6B-BT
1	$\uparrow$	1
GS-6-W	GS-6A-W	GS-6B-W
		*
GS-6-WT	GS-6A-WT	GS-6B-WT
	lacktriangle	7
GS-7-B	GS-7A-B	GS-7B-B
4		*
GS-7-BT	GS-7A-BT	GS-7B-BT
4		4
GS-7-W	GS-7A-W	GS-7B-W
GS-7-WT	GS-7A-WT	GS-7B-WT
UB-3	UB-3A	UB-3B
$\uparrow$	1	$\uparrow$

## Car Operation Panel: G1NS series & Hall Indicator Button: G1NL series

\*Note: Applicable to Wide Car type models

#### POP type

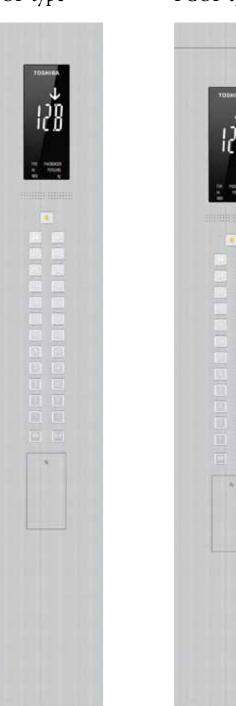


POP-G1NS

OPTIONAL

#### FCOP type

FCOP-G1NS

OPTIONAL

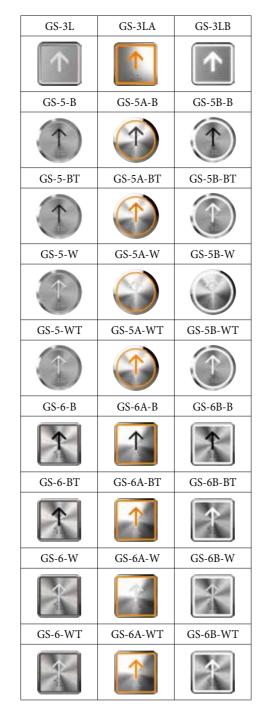

#### Button Line-up

### LED Segment




#### LED Dot Matrix

 $\mbox{\ensuremath{\%}}$  Note: A white color or orange color can also be selected for the LED light.



#### Button Line-up

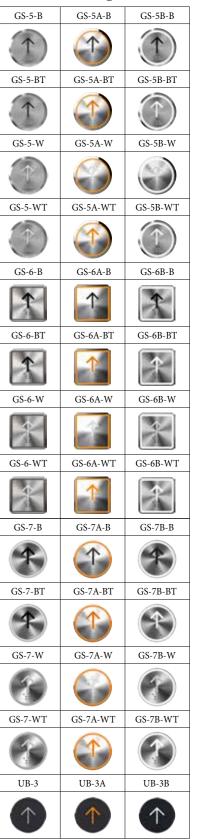

## Car Operation Panel: G1L series

\*Note: Applicable to Wide Car type models

#### POP type



POP-G1L-104C OPTIONAL




PRM-1



FCOP type






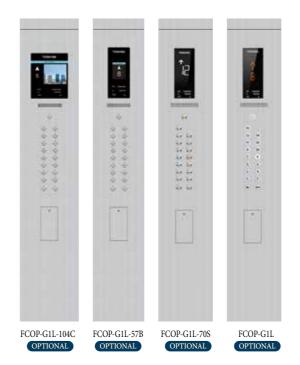



#### **Button Line-up**

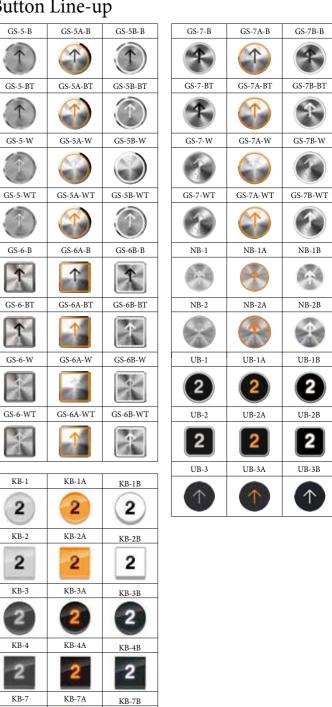

KB-8B

KB-8

KB-8A

## Car Operation Panel & Hall Indicator Button: G1N series

 $\ensuremath{\ensuremath{\mathsf{W}}}$  Note: Applicable to Wide Car type models



COP-G1N OPTIONAL COP-G1N-70S

#### Button Line-up

NB-1	NB-1A	NB-1B
*	*	1
NB-2	NB-2A	NB-2B
X		#



#### HIB type

## LCD Segment




#### Button Line-up

NB-1	NB-1A	NB-1B
*		个
NB-2	NB-2A	NB-2B
X		4


#### LED Dot Matrix


 $\mbox{\ensuremath{\%}}$  Note: A white color or orange color can also be selected for the LED light.

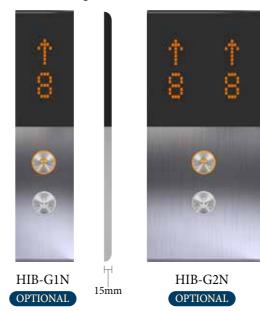

## Car Operation Panel & Hall Indicator Button : G1L · G1K series

\*Note: Applicable to Wide Car type models

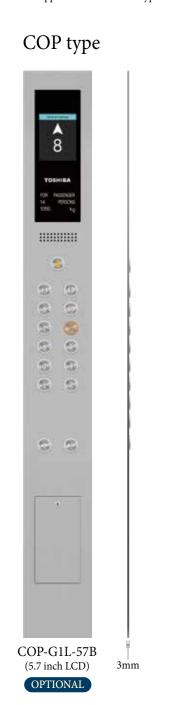





#### Button Line-up



#### COP type



COP-G1K-O

#### HIB type




#### Button Line-up




## Car Operation Panel: HCOP series

 $\ensuremath{\ensuremath{\mathsf{W}}}$  Note: Applicable to Wide Car type models

#### HCOP type

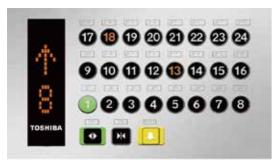

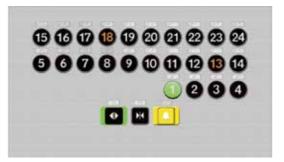

HCOP-G1D OPTIONAL

HCOP-G1D-N OPTIONAL



#### Button Line-up

UB-1	UB-1A	UB-1B
2	2	2
UB-2	UB-2A	UB-2B
2	2	2



HCOP-G1NS-N OPTIONAL

#### Button Line-up

GS-3L	GS-3LA	GS-3LB
<b></b>	<b>←</b>	<b>*</b>
GS-5-B	GS-5A-B	GS-5B-B
1		
GS-5-BT	GS-5A-BT	GS-5B-BT
1		
GS-5-W	GS-5A-W	GS-5B-W
GS-5-WT	GS-5A-WT	GS-5B-WT
GS-6-B	GS-6A-B	GS-6B-B
1	1	7
GS-6-BT	GS-6A-BT	GS-6B-BT
1	1	
GS-6-W	GS-6A-W	GS-6B-W
*		*
GS-6-WT	GS-6A-WT	GS-6B-WT
7	1	*



HCOP-G1K-N OPTIONAL

#### Button Line-up

		•
KB-1	KB-1A	KB-1B
2	2	2
KB-2	KB-2A	KB-2B
2	2	2
KB-3	KB-3A	KB-3B
2	2	2
KB-4	KB-4A	KB-4B
2	2	2
KB-7	KB-7A	KB-7B
8	3	2
KB-8	KB-8A	KB-8B
	2	2

## Hall Button OPTIONAL





#### Button Line-up

NB-1	NB-1A	NB-1B
X		*
NB-2	NB-2A	NB-2B
		(+)
GS-3L	GS-3LA	GS-3LB
$ \boxed{ \uparrow } $	<b>+</b>	+

#### Button Line-up

KB-1	KB-1A	KB-1B
2	2	2
KB-2	KB-2A	KB-2B
2	2	2
KB-3	KB-3A	KB-3B
2	2	2
KB-4	KB-4A	KB-4B
2	2	2
KB-7	KB-7A	KB-7B
	3	2
KB-8	KB-8A	KB-8B
<b>E</b>	2	2

## Hall Lantern

#### Hall Lantern OPTIONAL

 $\ensuremath{\mathrm{\%}}$  Note: A white light or orange light can also be selected for the lantern light.









HL-G1-O (Orange light)

HL-G2-W (White light)

HL-G3-O (Orange light)

HL-G4-O (Orange light)

## Hall Indicator

#### Hall Indicator OPTIONAL

LED Dot matrix

\*Note: A white color or orange color can also be selected for the LED light.





HI-G1-O

HI-G34-O

#### LCD Hall Indicator OPTIONAL

5.7 inch Color LCD





Controlled status

HI-G1L-57B


### Car Position Indicator

#### Large LCD Indicator for Car Operation Panel OPTIONAL


These 10.4 inch and 8.4 inch LCD indicators are capable of displaying in the elevator's various conditions (emergency operations, maintenance status) in large icons and letter in highly visible colors.

#### 10.4 inch Color LCD

#### General car display (Without monitoring)

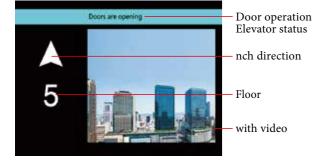

#### 8.4 inch Color LCD



General car display (With monitoring)



A 8

Doors are opening.

A With monitoring



Display under controlled status





#### 5.7 inch Color LCD

General car display



With monitoring



With video



Controlled status



#### LCD Segment



LED Segment



#### LED Dot matrix



## **Functions**

 $\bigcirc$ : STANDARD  $\triangle$ : OPTIONAL

Functions	Notes	Descriptions					
	Simplex selective-collective fully automatic operation	Fully automatic operation by hall and car calls for single car	0				
	Duplex selective collective fully automatic operation (Note 1)	Fully automatic operation for 2 cars in the same group	Δ				
	3 or 4-car group supervisory control system (Note 1)	Fully automatic operation for 3 or 4 cars in the same group	Δ				
Operations	Group supervisory control system	For supervisory operation of groups of more than 4 cars, please contact us	Δ				
	FLOORNAVI	Destination Control System					
	Independent operation	Lift car separated from group control operation and responde to car call only	Δ				
	Attendant operation	Operation by attendant by switch & button provided at service cabinet in COP	Δ				
	Automatic landing function when system fails	When system failure occurs, the lift will automatically land at the nearest floor and the door will open for passengers to exit	0				
	Automatic withdrawn from group control	If an elevator under a group supervisory operation fails to run for some reason, the elevator is cut out of the group and the other elevators automatically back up the faulty one to continue the group supervisory operation.	0				
	Car inspection operation [INS]	During car inspection operation, the lift car will run at slowly speed without responding to hall call	0				
	Overload protection	The car overload buzzer will sound to prevent overloading and the doors will remain open	0				
	Fireman's operation (Note 2)	In the event of fire, when the Fireman's switch is activated, the designated lift will be ready for firemen to use					
	Fire emergency operation	In the event of fire, all lifts will return to the designated floor and stop operation to allow passengers to exit	Δ				
Safety	Emergency operation indication at COP	In the event of an emergency, the emergency operation status will be displayed at COP	0				
Functions	Power failure emergency operation	In the event of power failure, all lifts will return to the designated floor by emergency power supply from the building to allow passengers to exit					
	Automatic landing during power failure [TOSLANDER]	In the event of power failure, the lift will land at the nearest floor by emergency battery	Δ				
	Earthquake emergency operation	In the event of an earthquake, the elevator will detect the seismic signal and land at the nearest floor	Δ				
	In-car emergency lamp [Self-charging]	In the event of power failure, the in-car emergency lamp will be activated	0				
	Emergency call button	A button for passenger to make an emergency call when they are trapped inside the lift	0				
	Door open when lift car is overloaded	The doors will re-open when over load is detected, even during the closing of doors.	0				
	Mechanical door safety	When the mechanical door safety device is touched by a passenger, the door will open	Δ				
	Multi-beam door safety sensor [Or light curtain door safety sensor]	When the multi-beam door safety device senses a passenger, the door will open	Δ				
	2 in 1 door safety [Multi-beam door safety + Mechanical door safety]	A combination of multi-beam door safety and mechanical door safety	0				
	Home landing	To reduce passenger waiting time, the lift will return to the designated floor and stand by	Δ				
Service Functions	Service floor cut-off selection [Software interface]	This is of the free setting type, where the elevator superintendent for every building is free to set and modify service cutt-off floors even after in use. This is the most appropriate type for such office buildings as their tenants are not yet fixed before complection.	Δ				

- Notes

  1: Not applicable to lift car with through door.


  2: Fire emergency operation and fireman service cannnot be applied simultaneously.


  3: Standard function for 2-car operation or 3-car operation.

  4: Car load is less than 150kg and there are five or more registered car calls.


 $\bigcirc$ : STANDARD  $\triangle$ : OPTIONAL

Functions	Notes	Descriptions						
	Service floor cut-off selection [Manual]	linstalling a switch or a timer on the supervisory panel, disables registration of car calls or hall calls for a basement floor's or an intermediate floors or intermediate floors thus engaging in non-stop (bypass) without servicing there.	Δ					
	Full car bypass (Note 3)	When the lift car is full, the lift will bypass all hall calls and go straight to the designated floor	0					
	Car call cancellation	The floor call can be cancelled from the COP by pressing the floor button twice within 3 second	0					
	Nuisance call cancellation (Note 4)	Incorrect or nuisance floor calls can be cancelled to eliminate unnecessary operation	0					
	Door repeated opening	When an obstacle is detected, the door will repeatedly open and close until the obstacle is removed	0					
	Car indicator	Car indicator with the car operating panel	0					
	Adjustable door opening time	Adjusts the door opening time to reflect building usage	0					
	Door open extension button	Extends the door opening time						
	Car chime	A chime installed in the car ceiling will sound when the lift arrives						
	Hall chime	A chime installed in the lift lobby will sound when the lift arrives	Δ					
	Car full load indicator	"Full Load" will display on the hall indicator when the lift car is full	0					
	Hall lantern	The hall lantern will light up when the lift arrived						
Service Functions	Sub car operating panel	Additional car operating panel	Δ					
Tunctions	Out of service indicator	"Out of Service" will display on the hall indicator when the lift car is faulty	0					
	Parking operation [Manual]	Parks the lift at designated floor by key-switch	0					
	Parking operation [Automatic]	Parks the lift at designated floor auotmatically						
	Car lighting automatic cut-off	When the lift is not in operation after a pre-determined period of time, the car light will turn off automatically	0					
	Ventilation fan automatic cut-off	When the lift is not in operation after a pre-determined period of time, the ventilation fan will turn off automatically	0					
	Door Open button lamp [For automatically cut-off car lighting]	The "Door Open" button will remain lit when the lift car light is turned off automatically	0					
	Nuisance call cancellation at reversal	Cancel intentionally registered nuisance calls automatically in the reversal travel direction	0					
	Multi-channel intercom	The intercom system can communicate with multi-stations simultaneously	0					
	Designated floor stop operation	Automatically stops the lift at the designated floor for crime prevention purposes	Δ					
	Card access system	Allows activation of the disnated floor call by IC card	Δ					
	Speech synthesizer	Announces car operations	Δ					
	Supervisory panel	Located in the building control room, etc. to monitor the status and control of each lift	Δ					

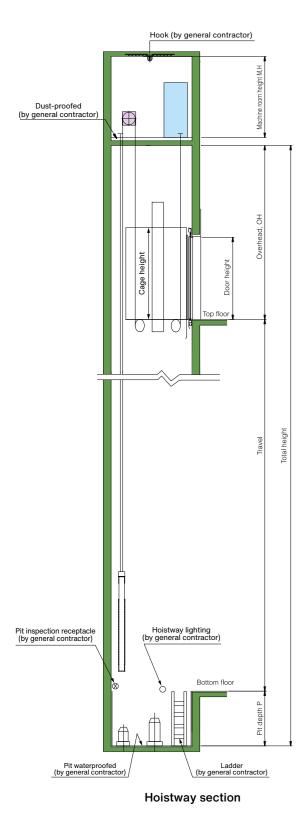

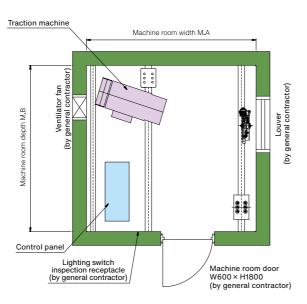

Machine room plan

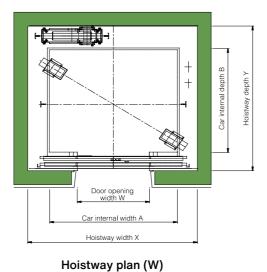

## **Specifications**

Type		Nos.of Person		Speed	Cage s Internal(		Door er (m		C/W	Hoistway	size(mı	m)	Machine r dimensions		Max. Service	Max. Travel															
- "		Person	(kg)	(m/s)	A×B	Height	Width	Height		X×Y	ОН	Р	MA×MB	MH	Stops(s)																
DO 0000							800			2000×1720	0700	4000	2000×1720			00															
P8-CO60	W			1			900	1		2200×1720	3700	1300	2200×1720	1		90															
D0 0000	١,,,			4.0			800	1		2000×1720	3900	1400	2000×1720	1																	
P8-CO96	W	8	630	1.6	1400×1100	2300	900	2100	Rear	2200×1720	3900	1400	2200×1720	2100	40	100															
D0 0040E	١٨,	٥	030	4.75	1400^1100	2300	800	2100	Real	2000×1720	3950	1450	2000×1720	2100	40	100															
P8-CO105	W			1.75			900	1		2200×1720	3950	1450	2200×1720	1																	
D0 00400	w			2			800	]		2000×1720	4050	1650	2000×1720	1		125															
P8-CO120	VV						900			2200×1720	4050	1000	2200×1720																		
D11 COC0	w			1			800			2000×1970	3700	1300	2000×1970			90															
P11-CO60	VV			'			900			2200×1970	3700	1300	2200×1970			00															
P11-CO96	w			1.6			800			2000×1970	3900	1400	2000×1970																		
P11-C096	VV			1.0			900			2200×1970	3900	1400	2200×1970			100															
P11-CO105	w	11	825	1.75	1400×1350	2300	800	2100	Rear	2000×1970	3950	1450	2000×1970	2100	40	100															
P11-C0105	VV	'''	020	1.75	1400 × 1330	2300	900	2100	Real	2200×1970	3930	1430	2200×1970	2100	40																
P11-CO120	w			2			800	]		2000×1970	4050	1650	2000×1970																		
F11-C0120	VV				_		900			2200×1970		1030	2200×1970			125															
P11-CO150	w			2.5			800			2000×1970	4250	2100	2000×1970			123															
F11-00130	VV			2.0			900			2200×1970	4230	2100	2200×1970																		
																						900	_		2200×2020	]		2200×2020			
P14-C060	W			1			1000			2400×2020	3700	1300	2400×2020			90															
							1100			2600×2020			2600×2020																		
							900			2200×2020	]		2200×2020																		
P14-CO96	W			1.6			1000			2400×2020	3900	1400	2400×2020																		
							1100			2600×2020			2600×2020			100															
							900	]		2200×2020			2200×2020			100															
P14-CO105	W	14	1050	1.75	1600×1400	2300	1000	2100	Rear	2400×2020	3950	1450	2400×2020	2100	40																
							1100	_		2600×2020			2600×2020																		
							900			2200×2020			2200×2020																		
P14-CO120	W			2			1000			2400×2020	4050	1650	2400×2020	1																	
							1100	]		2600×2020			2600×2020			125															
							900	1		2200×2020			2200×2020																		
P14-CO150	W			2.5			1000			2400×2020	4250	50 2100	2400×2020	1																	
							1100			2600×2020			2600×2020																		

W: Wide car

- The above table complies with GB7588:2003 standards.
- Please contact to our local distributor to check for other standards.
- In case of travel is 40m or more, add 150mm to OH dimension and TC dimension at the above-stated dimension.
- Hoistway dimensions take into account the error of up to 50 mm after the construction work.
- The hoistway dimensions in chart are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
   Piping, wiring and cables which is not relevant to elevator are prohibited inside the hoistway.
- OH value in the chart is for standard ceiling. As for the non-standard cars, please consult our local distributor.
  If the size of the hoistway is greater than the above sizes, OH will be larger. Please consult our local distributor.
  If the location of Power source panel, Control panel and Electric power supply are changed. Please consult our local distributor.

# Hook (by general contractor) Dust-proofed (by general contractor) Pit inspection receptacle (by general contractor) Pit waterproofed (by general contractor)


Hoistway section

Control panel


Machine room width M.A

Machine room door W600 × H1800
(by general contractor)

Machine room plan

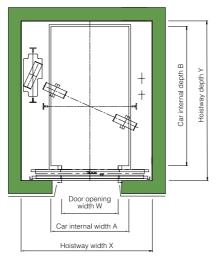

Hoistway plan (D)

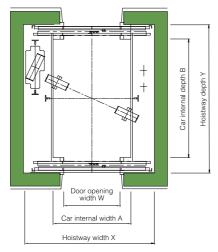

Hoistway plan (D2)

## **Specifications**

P8-CO60         D         1         800 900         1970×1760 2140×1760         3700 2140×1760         1300 2140×1760         1970×1760 2140×1760           P8-CO96         D         1.6         800 900         1970×1760 2140×1760         3900 2140×1760         1400 2140×1760         1970×1760 2140×1760		МН	Servic Stops(	e Travel s) (m)
P8-CO60 D P8-CO96 D P8-CO105 D P8-CO120 D P8				
P8-C096 D P8-C0105 D P8-C0120 D P		1		-00
P8-CO96 D 8 630 1.6 1.00×1400 2300 900 2100 Side 2140×1760 3900 1400 2140×1760 2140×17				90
P8-C0120 D 8 630 1100×1400 2300 900 2100 Side 2140×1760 1970×1760 2140×1760 2140×1760 2140×1760 2140×1760 2140×1760 2140×1760 2140×1760 2140×1760 2140×1760 1970×1760 4050 1650 1970×1760				
P8-C0105 D 1.75 800 1970×1760 2140×1760 2140×1760 2140×1760 1970×1760 2140×1760 1970×1	2100	210	40	100
900 2140×1760 2140×1760 P8-CO120 D 2 800 1970×1760 4050 1650 1970×1760	2100	210	40	100
P8-CO120   D       2				
10-00120   B     2       900       2140×1760   1000   2140×1760				125
2140^1700 2140^1700				120
P11-C060 D 800 1970×2060 1970×2060			40	
1 900 2140×2060 3700 1300 2140×2060				90
P11-C060 D2 800 1970×2170 1970×2170		-	*	
900 2140×2170 2140×2170	-	-		-
P11-C096 D 800 1970×2060 1970×2060 2440×2000		-	40	
1.6 900 2140×2060 3900 1400 2140×2060 4070×0470	-	-		4
P11-C096 D2 800 1970×2170 1970×2170 2140×2170 2140×2170		-	*	
900 2140×2170 2140×2170 800 1970×2060 1970×2060	-	-		100
P11-C0105 D		-	40	
11 825 1.75 1100×1700 2300 800 2100 Side 2140×2000 3950 1450 2140×2000 2	2100	2100	-	
P11-C0105 D2 900 2140×2170 1970×2170 2140×2170		-	*	
800 1970×2060 1970×2060	H	1	-	
P11-CO120 D 900 2140×2060 2140×2060			40	
800 1970×2170 4050 1650 1970×2170	ŀ			_
P11-C0120 D2 900 2140×2170 2140×2170			*	
800 1970×2060 1970×2060	ŀ	1		125
P11-C0150 D 900 2140×2060 2140×2060			40	
2.5 800 1970×2170 4250 2100 1970×2170	Ī	1	\* <u>'</u>	
P11-C0150 D2 900 2140×2170 2140×2170		⊣	*	
P14-C060 D 800 1970×2460 1970×2460			40	
900 2140×2460 3700 1300 2140×2460			40	90
P14-C060 D2 800 1970×2570 1000 1970×2570			*	
900 2140×2570 2140×2570				
P14-C096 D 800 1970×2460 1970×2460			40	
1.6 900 2140×2460 3900 1400 2140×2460	ļ	1		_
P14-C096 D2 800 1970×2570 1970×2570		-	*	
900 2140×2570 2140×2570 2140×2570		-		100
P14-C0105 D 800 1970×2460 1970×2460 2140×2460 2140×2460		-	40	
14   1050   1.75   1100×2100   2300   2100   Side   2100   3950   1450   2100   2	2100	210		-
P14-C0105 D2 800 1970×2570 1970×2570 2140×2570 2140×2570		-	*	
800 2140×2570 2140×2570 1970×2460		-	-	
P14-C0120 D 2140x2460 2140x2460		-	40	
2 800 1970×2570 4050 1650 1970×2570		-		-
P14-C0120 D2 900 2140×2570 1970×2070 2140×2570		1	*	
800 1970×2460 1970×2460	}	1		125
P14-C0150 D 900 2140×2460 2140×2460		_	40	
2.5 800 1970×2570 4250 2100 1970×2570	ŀ	1	-	$\dashv$
P14-C0150 D2 900 2140×2570 2140×2570		1	*	

D: Deep car D2: Front and rear opening door \*\*Consult our local distributor

#### Note:

- The above table complies with GB7588:2003 standards.
- Please contact to our local distributor to check for other standards.
- In case of travel is 40m or more, add 150mm to OH dimension and TC dimension at the above-stated dimension.
- Hoistway dimensions take into account the error of up to 50 mm after the construction work.
- The hoistway dimensions in chart are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables which is not relevant to elevator are prohibited inside the hoistway.
- OH value in the chart is for standard ceiling. As for the non-standard cars, please consult our local distributor.
  If the size of the hoistway is greater than the above sizes, OH will be larger. Please consult our local distributor.
- If the location of Power source panel, Control panel and Electric power supply are changed. Please consult our local distributor.

Hook (by general contractor)

# Dust-proofed (by general contractor) Hoistway lighting (by general contractor) Pit inspection receptacle (by general contractor) Ladder (by general contractor) Pit waterproofed (by general contractor)

Hoistway section

Machine room plan

Car internal width A Hoistway width X

Hoistway plan

Machine room door W600 × H1800

Traction machine


## **Specifications**

Туре		Nos.of	Capacity	Speed	Cage s Internal(			ntrance nm)	C/W	Hoistway	y size(m	m)	Machine r dimensions		Max. Service	Max. Travel	
,,		Person	(kg)	(m/s)	A×B	Height	Width	Height		X×Y	ОН	Р	MA×MB	MH	Stops(s)	(m)	
							900			2150×2070			2150×2070				
P14-CO180	W	14	1050	3	1600×1400	2300	1000	2100	Rear	2350×2070	4950	2500	2350×2070	2100	48	150	
							1100			2550×2070			2550×2070				
D1E COCO	w			1			1000			2350×2170	3900	1380	2350×2170			90	
P15-CO60	VV			_ '			1100			2550×2170	3900	1360	2550×2170			90	
D45 0000	۱۸/			4.0			1000			2350×2170	4050	1450	2350×2170				
P15-CO96	W			1.6			1100			2550×2170	4050	1450	2550×2170			400	
D 00.105	١			4.75			1000			2350×2170	4400	4400	2350×2170			100	
P15-CO105	W	15	1150	1.75	1800×1500	2300	1100	2100	Rear	2550×2170	4100	1480	2550×2170	2100	48		
D45 00400	۱۸/			0			1000			2350×2170	4200	1600	2350×2170				
P15-CO120	W			2			1100			2550×2170	4200	1600	2550×2170				
							1000	1		2350×2170	4500	0000	2350×2170	1			
P15-CO150	W			2.5			1100	1		2550×2170	4500	2000	2550×2170	1		150	
				_			1000	1		2350×2170			2350×2170	ĺ			
P15-CO180	W			3			1100	1		2550×2170	4950	2500	2550×2170	1			
P17-C060	w			1							3900	1380				90	
P17-C096	W			1.6							4050	1450					
	w			1.75							4100	1480				100	
P17-CO120	W	17	1275	2	2000×1400	2300	1100	2100	Rear	2550×2070	4200	1600	2550×2070	2100	48		
	W			2.5							4500	2000				150	
	-			3							4950	2500	-			150	
P17-CO180	W										3900	1380				00	
P18-C060	W			1												90	
P18-C096	W			1.6							4050	1450				100	
	W	18	1350	1.75	2000×1500	2300	1100	2100	Rear	2550×2170	4100	1480	2550×2170	2100	48		
	W			2							4200	1600					
	W			2.5								2000	-			150	
P18-CO180	W			3							4950	2500					
P21-C060	w			1			1100			2550×2370	3900	1380	2550×2370			90	
	_						1200			2750×2370			2750×2370				
P21-C096	w			1.6			1100				2550×2370	4050	1450	2550×2370	ļ		
								1200			2750×2370			2750×2370			100
P21-CO105	w			1.75			1100			2550×2370	4100	1480	2550×2370			100	
121-00103	**	21	1600		2000×1700	2300	1200	2100	Rear	2750×2370	4100	1400	2750×2370	2100	48		
P21-CO120	w		1000	2	2000-1700	2000	1100	2100	i toui	2550×2370	4200	1600	2550×2370	2.00	10		
1 21-00120	vv						1200			2750×2370	4200	1000	2750×2370				
P21-CO150	w			2.5			1100			2550×2370	4500	2000	2550×2370			150	
F21-C0130	VV			2.0			1200			2750×2370	4500	2000	2750×2370			130	
P21-CO180	w			3			1100			2550×2370	4050	2500	2550×2370				
P21-C0100	VV						1200			2750×2370	4950	2500	2750×2370				
P24-CO60	W			1							3900	1380				90	
P24-CO96	W			1.6							4050	1450					
P24-CO105	W			1.75							4100	1480	1			100	
P24-C0120	w	24	1800	2	2100×1750	2300	1200	2100	Rear	2750×2420	4200	1600	2750×2420	2100	48		
P24-CO150	W			2.5							4500	2000				150	
P24-CO180	W			3							4950	2500					
P26-CO60	$\overline{}$			1							3900	1380				90	
	w			1.6							4050	1450					
P26-CO105	-			1 75							4100	1480				100	
P26-CO105		26	2000	2	2100×1950	2300	1200	2100	Rear	2750×2620	4200	1600	2750×2620	2100	48		
	-										4500	2000	-			150	
	W			2.5							-	2500	-			150	
	W			3							4950				-		
P30-CO60	W			1							3900	1380				80	
P30-CO96	W	30	2250	1.6	2300×1950	2300	1200	2100	Rear	2850×2620	4050	1450	2850×2620	2100	48		
P30-CO105	W			1.75							4100	1480				100	
P30-CO120	w			2	1			1	1	1	4200	1600	I	I	1		


W: Wide car

- The above table complies with GB7588:2003 standards.
- Please contact to our local distributor to check for other standards.
- In case of travel is 40m or more, add 150mm to OH dimension and TC dimension at the above-stated dimension.
   Hoistway dimensions take into account the error of up to 50 mm after the construction work.
- The hoistway dimensions in chart are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables which is not relevant to elevator are prohibited inside the hoistway.
- OH value in the chart is for standard ceiling. As for the non-standard cars, please consult our local distributor.
  If the size of the hoistway is greater than the above sizes, OH will be larger. Please consult our local distributor.


• If the location of Power source panel, Control panel and Electric power supply are changed. Please consult our local distributor.

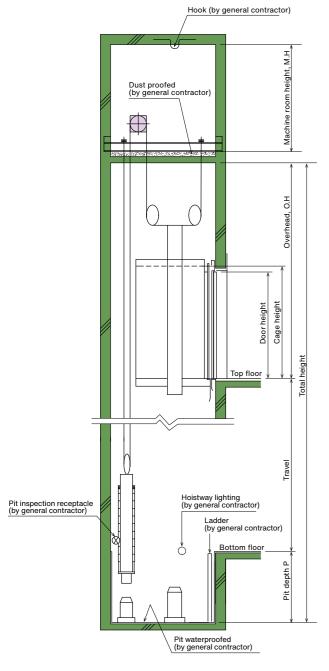

Hoistway section

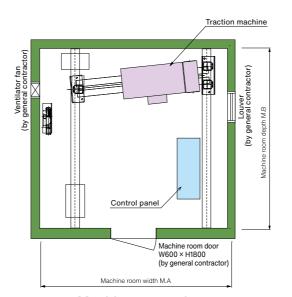

Machine room plan

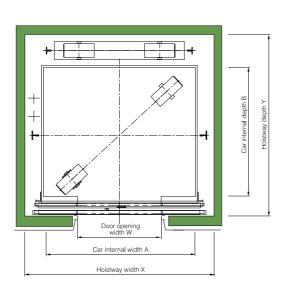

Hoistway plan


## **Specifications**

Туре		Nos.of Person				Speed	Cage s Internal(			ntrance nm)	C/W	Hoistway	size(m	m)	Machine r dimensions		Max. Service	Max. Travel						
• •		reisuii	(kg)	(m/s)	A×B	Height		Height		X×Y	OH	Р	MA×MB	MH	Stops(s)									
P11-CO210	w			0.5			800			1900×2150	5050	2250	1950×2150											
P11-C0210	VV	11	825	3.5	1400×1350	2300	900	2100	00 Rear	2100×2150	5950 325	3250	2150×2150	2050										
P11-CO240	w	''	020						4	14001000	2000	800	2.00		1900×2150	0500	3850	1950×2150	2250	64	200			
P11-CO240	VV			4			900			2100×2150	6500	3850	2150×2150											
															900			2100×2200			2150×2200			ı —
P14-CO210	w			3.5			1000	00		2300×2200	5950	3250	2350×2200			1								
		14	1050		1600×1400	2300	1100	2100	Rear	2500×2200			2550×2200	2250	64	200								
	P14-C0240 W	14	14	14	14	1030		1000^1400	2300	900	2100	Neai	2100×2200			2150×2200	2230	04	200					
P14-CO240				4			1000			2300×2200	6500	3850	2350×2200											
							1100			2500×2200			2550×2200											


#### W: Wide car

#### Note:


- The above table complies with GB7588:2003 standards.
- Please contact to our local distributor to check for other standards.
- In case of travel is 40m or more, add 150mm to OH dimension and TC dimension at the above-stated dimension.
- Hoistway dimensions take into account the error of up to 50 mm after the construction work.
- The hoistway dimentions in chart are the minimum requiment.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables which is not relevant to elevator are prohibited inside the hoistway.
- OH value in the chart is for standard type of ceiling models. As for the non-standard car designs, and ceiling models, please consult our local distributor.
- If the size of the hoistway is greater than the above sizes, OH will be larger. Please consult our distributor.
- If the location of power source panel, control panel and electric power supply are changed. Please consult our distributor.

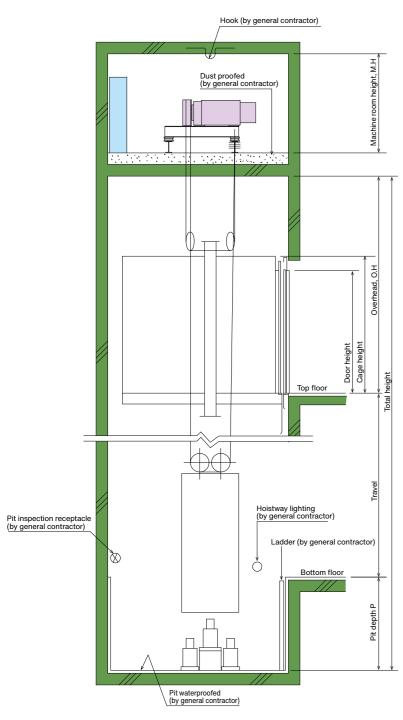


Hoistway section

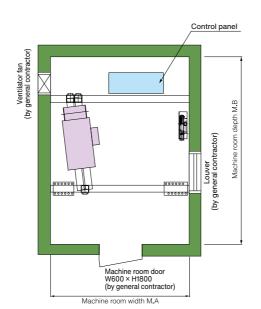

Machine room plan

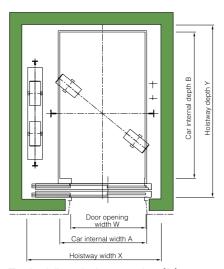

Typical floor hoistway plan (D)

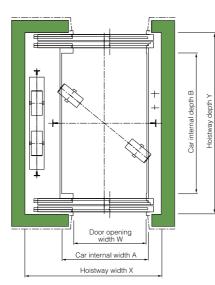

Typical floor hoistway plan (D2)


## **Specifications**

Type		Nos.of	Capacity	Speed	Cage s Internal(			ntrance nm)	C/W	Hoistway	/ size(m	m)	Machine r dimensions		Max. Service	Max. Trave
		Person	(kg)	(m/s)	A×B	Height	Width	Height		X×Y	OH	Р	MA×MB	МН	Stops(s)	
P14-CO180	w	14	1050	3	1600×1400	2300	800 900	2100	Side	2450×1850	4950	2500	2450×1850	2200	48	150
D45 0000							1000			2650×1890		4000	2650×1890			
P15-C060	W			1			1100	1		2750×1890	3900	1380	2750×1890			90
D45 0000	١,,,						1000	]		2650×1890	4050	4450	2650×1890			
P15-CO96	W			1.6			1100			2750×1890	4050	1450	2750×1890			400
D4F 0040F	w			4.75			1000			2650×1890	4400	1480	2650×1890			100
P15-CO105	VV	15	1150	1.75	1800×1500	2300	1100	2100	Side	2750×1890	4100	1480	2750×1890	2200	48	
P15-CO120	١,,,			_			1000			2650×1890	4200	1600	2650×1890			
P15-CU120	W			2			1100			2750×1890	4200	1600	2750×1890			
P15-CO150	w			2.5			1000			2650×1890	4500	2000	2650×1890			150
P15-CU150	VV			2.5			1100			2750×1890	4500	2000	2750×1890			130
P15-CO180	١٨,			3			1000			2650×1890	4950	2500	2650×1890			
P15-CU100	W			3			1100			2750×1890	4950	2500	2750×1890			
P17-2S60	D			1							3900	1380				90
P17-2S96	D			1.6							4050	1450				100
P17-2S105	D			1.75	1200×2300	2300	1100	2100	) Side	2110×2760	4100	1480	2110×2760	- 2200	48	
P17-2S120	D			2	2	2000	1100	2100		4200	4200	1600			"	
P17-2S150	D			2.5							4500	2000				150
P17-2S180	D	17	1275	3							4950	2500				
P17-2S60	D2	17	1275	1							3900	1380		2200		90
P17-2S96	D2			1.6							4050	1450				100
P17-2S105	D2			1.75	1200×2200	2300	1100	2100	Side	2110×2870	4100	1480	2110×2870		*	100
P17-2S120	D2			2	1200 2200	2000	1100	2100	Oluc	2110~2070	4200	1600	2110-2010		*	
P17-2S150	D2			2.5							4500	2000				150
P17-2S180	D2			3							4950	2500				
P21-2S60	D			1							3900	1380				90
P21-2S96	D			1.6							4050	1450				100
P21-2S105	D			1.75	1400×2400	2300	1200	2100	Side	2280×2860	4100	1480	2280×2860		48	.50
P21-2S120	D			2	"						4200	1600			"	
P21-2S150	D			2.5							4500	2000				150
P21-2S180	D	21	1600	3							4950	2500		2200		
P21-2S60	D2			1							3900	1380				90
P21-2S96	D2			1.6							4050	1450				100
P21-2S105	D2			1.75	1400×2300	2300	1200	2100	Side	2280×2970	4100	1480	2280×2970		*	.50
P21-2S120	D2			2				55	0.00		4200	1600				
P21-2S150	D2			2.5							4500	2000				150
P21-2S180	D2			3							4950	2500				


W: Wide car D: Deep car D2: Front and rear opening door X: Consult our local distributor

#### Note:

- The above table complies with GB7588:2003 standards.
- Please contact to our local distributor to check for other standards.
- In case of travel is 40m or more, add 150mm to OH dimension and TC dimension at the above-stated dimension.
- Hoistway dimensions take into account the error of up to 50 mm after the construction work.
- The hoistway dimensions in chart are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables which is not relevant to elevator are prohibited inside the hoistway.
- OH value in the chart is for standard ceiling. As for the non-standard cars, please consult our local distributor. • If the size of the hoistway is greater than the above sizes, OH will be larger. Please consult our local distributor.
- If the location of Power source panel, Control panel and Electric power supply are changed. Please consult our local distributor.

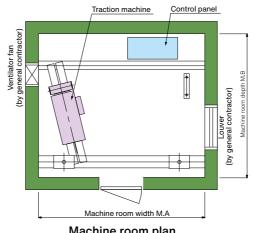

Machine room plan

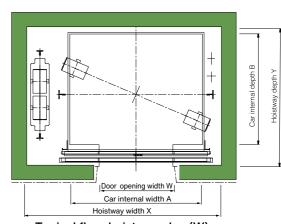

Typical floor hoistway plan (W)

## **Works by Others**

Works below are not included in elevator installation works:

#### **►** Hoistways

- 1. Hoistway construction and fire-proofing, and opening for jambs, indicators and push-buttons, etc. Please note that chipping or padding work is required according to the necessity, in case the error of the structure is 30 mm
- 2. Installation of separating beams, intermediate beam, back beam and lateral beams (if necessary).
- 3. Installation of the base plate for each floor and of bed steel for furnishing the equipment related to landing entrance, in case of hoistways of steel structure of PC structure.
- 4. Fire-proofing of steel frame material in steel structured hoistways, and fire-proofing around landing entrances (if necessary).
- 5. Finishing of walls and floors, etc., around entrances, after furnishing equipment related to landing entrances.

  6. Furnishing of base steel or others for furnishing rail brackets, especially where the floor height is high (if necessary).
- 7. Installation of the entrance or the gangway for pit inspection (if necessary).
- 8. Water-proofing of the pit (including drainage if necessary).
- 9. Rearrangement of the building body in case that there are some spaces to be used under the pit.
- 10. Installation of emergency exits for rescue purposes in the event there are floors at which the elevator does not stop and installation of a fascia plate.
- 11. Shelter equipment from rain at landing entrances directly contacting to the air in the place like roof.
- 12. Installation of hooks or beams on top of the elevator shaft.
- 13. Installation of lighting in hoistway (if necessary).
- 14. Installation of vent opening at the top of shaft (if necessary).

  15. Installation of a net or wall to prevent falling into the pit (in cases where the pit level is different.)
- 16. All related to the building structure other than works above.

#### ► Machine rooms

- 1. Construction of machine rooms and installation works of their entrances (including soundproofing work if necessary)
- 2. Fire-proofing for machine rooms and opening work for machine room floors.
- 3. Installation of machine beam supports and spacers.
- 4. Cinder concreting and finishing after floor piping in machine rooms.
- 5. Installation of hooks or beams on ceilings in machine rooms.
- 6. Installation of stairs leading to machine rooms and stairs in machine rooms (if necessary).
- 7. Installation of lighting and windows.
- 8. Dustproofing of floors.

#### ► Works for Equipment

- 1. Wiring of the power supply for motors and that for lighting equipment, and of grounding to power source panels of elevators in the Elevator shaft.
- 2. Wiring of the power supply to the supervisory panels.
- 3. Piping and wiring of intercoms outside hoistway and of others necessary for elevators.
- 4. Supply and installation of switching devices for emergency power supply in case of power failure and two pairs of relay contacts for normal / emergency power identification, and their piping and wiring (if necessary).
- 5. Piping and wiring of supervisory panels, alarm panels and inter-communication systems, etc., outside hoistways.
- 6. Furnishing of receptacles for inspection in pits.

#### ► Temporary Works

It is required to arrange the following matters:

- 1. To secure the site office for installation work and the stock yard for materials without charge.
- 2. Enclosure to be used during the installation work.
- 3. Supply of electric power for installation work and the trial operation for adjustment.
- 4. Security of enough passage for carrying heavy goods.
- 5. On use of elevator for the construction work of the building, It is required to make contract with a separate written estimate.

#### Note

During equipment planning of elevators, please take the following items into consideration:

- 1. Provide power facility so that voltage regulation of the power supply at the receiving terminals in the hoistway is kept within  $\pm 10\%$  for the motor, and ±2% for the lighting equipments.
- 2. In the hoistways, please prevert the temperature from exceeding 40  $^{\circ}\text{C}$  and humidity from exceeding 90% (monthly mean) and 95% (daily mean).
- 3. Please do not allow any chemically toxic gas or an excessive amount of dust to enter into the hoistways, as these can corrode the metal or electrical contacts.

When asking for an estimate, please inform us of the following:

- 1. Building name and address.
- 2. Desired type and number of set.
- 3. Number of stops.
- 4. Floor height.
- 5. Voltage and frequency of main power supply.
- 6. Desired completion date.

#### Memo

### **Global Network**

Head office / Manufacturing baseHead office

A TOSHIBA ELEVATOR AND BUILDING SYSTEMS CORPORATION

Head Office: 72-34, Horikawa-cho, Saiwai-ku, Kawasaki 212-8585, Japan Factory: 1 Toshiba-cho, Fuchu City, Tokyo 183-8511

- B TOSHIBA ELEVATOR (SHENYANG) CO., LTD.
  Head Office: No.5 Feiyun Road Hunnan New District Shenyang,
  The People's Republic of China
- TOSHIBA ELEVATOR (CHINA) CO., LTD.
  Head Office: No. 685 Wen Chuan Road, Baoshan District,
  Shanghai 201901, The People's Republic of China.
- CHEVALIER (HK) LIMITED

  Head Office: 22nd Floor, Chevalier Commercial Centre, 8

  Wang Hoi Road, Kowloon Bay, Hong Kong
- CHEVALIER SINGAPORE HOLDINGS PTE. LTD.
  Head Office: 23 Genting Road #07-01/02 Chevalier House,
  Singapore 349481

63

TOSHIBA ELEVATOR (MALAYSIA) SDN. BHD.

Head Office: Wisma TMEL, No.15, Jln Kuchai Maju 4, Kuchai Entrepreneurs' Park, Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia.

- TOSHIBA ELEVATOR MANUFACTURING ASIA SDN. BHD.
  Head Office: 2530, Lorong Perusahaan 10 Prai Industrial Estate
  Prai 13600 Pulau Pinang, Malaysia
- TOSHIBA JOHNSON ELEVATORS (INDIA) PVT. LTD.
  Head Office: 602, 6th Floor, C&B Square, Sangan Complex
  127, Andheri Kurla Road. Andheri (East), Mumbai,
  400059 India
- TOSHIBA ELEVATOR MIDDLE EAST (L.L.C.)
  Head Office: P. O. Box 16733, Dubai, UAE
- Toshiba Elevator (Vietnam) Limited Liability Company Head Office: No. 36, Street 96, Quarter 2, Thanh My Loi Ward, Thu Duc City, Ho Chi Minh City, Vietnam

Together with our global partners, we connect with Asia and then the world, through our technology and our spirit.

This planet is our shared heritage. We must live together, grow together and delight in one another.

[For more information]

#### **Toshiba Elevator and Building Systems Corporation**

Head office: 72-34, Horikawa-cho, Saiwai-ku, Kawasaki 212-8585, Japan

https://www.toshiba-elevator.co.jp/elv/infoeng/

