### **3rd Edition**

#### For EN standard

\* Revised publication effective Jun. 2023

**Safety Cautions** 

- Observance of relevant laws / regulations are required.
- Read the entire "Instruction Manual" carefully before use, for important information about safety, handling and operation.

#### **TOSHIBA**

Toshiba Elevator and Building Systems Corporation

72-34, Horikawa-cho, Saiwai-ku, Kawasaki 212-8585, Japan

Please enter the contents from the "Inquiry Input Form" in website. https://www.toshiba-elevator.co.jp/elv/infoeng/

GK-F208(3)-2306-1000-2306(TD)

### **TOSHIBA**

Toshiba Machine-room-less Elevators Standard Passenger Elevator

**SPACEL-III** 

For EN standard

<sup>-</sup> The data given in this catalog are subject to change without notice.

## THE SOLUTIONS

### **COMPANY SOLUTIONS**

Toshiba Elevator and Building Systems Corporation has built a framework which encompasses all aspects from system development to production, sales to marketing, installation, adjustment, maintenance and services in order to provide clients with the highest quality products and services.

Utilizing the comprehensive technological infrastructure developed by Toshiba Group in more than 140 years since its foundation, we aim to enhance the leading edge technology and quality that we used to develop the ultra high speed elevator, harnessing Toshiba's technological innovations to their fullest extent. To meet clients' expectations and requirements for safe and pleasant elevators as well as constantly pursuing further innovation and improvement. Furthermore, we are aiming to strengthen system development, production, enhancing sales channel and sales partnership to expand in the global market.

### **CONCEPT of SPACEL-**

Toshiba manufactures elevators by applying the latest technology and improved elevator development skills. SPACEL-III, the most recent high-end machine room less elevator, which incorporates various technologies to save energy and time, contributes to global environment.

#### **■ Product Line-up**

Expanded the applicable speed of the SPACEL-III.

We can comply with various needs such as building use, layout design, etc.

Scope of specification	Range of application	
Passenger	8 ∼ 26 persons	
Rated load	630 ∼ 2000 kg	
Rated speed	1.0 ~ 3.0 m/s	

Note1: Applicable range of rated speed 3.0m/s are rated load 1150kg or more. Note2: The above scope complies with EN81-20/50

	3.0										
	2.5										
Rated speed	2.0				eп	A C		- III			
(m/s)	1.75				3P	AL		-1111			
	1.5/1.6										
	1.0										
Rated lo	oad (kg)	630	825	1000	1050	1150	1275	1350	1600	1800	2000
Ту	ре	P8	P11	P13	P14	P15	P17	P18	P21	P24	P26



#### Contents


The Solutions

Company Solutions
Concept of ELCOSMO-III
Technology
New Technology
Safety Function
Energy Saving & Environment
Expansion of variations in car ceiling design
Car Design
RESIDENCE
HOTEL
SHOP
SHOP
Hall Design
Hall Decoration Item Variation
Operation Systems
Functions
- 4.1.601.021.0
Hoistway Layout/
Specifications
Works by Others
Global Network

..P.49

..P.59

## **TECHNOLOGY**

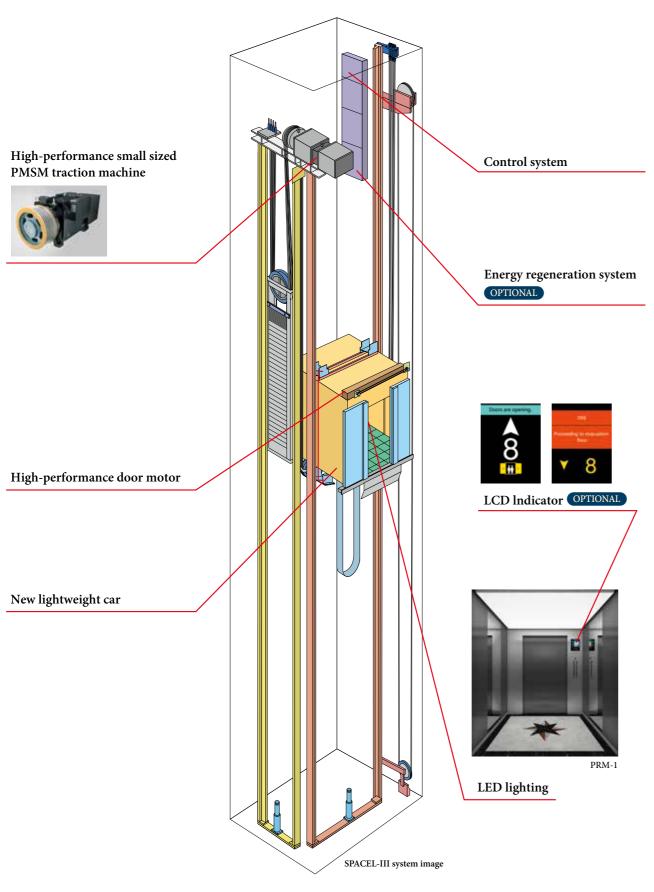

### **New Technology**

### High-performance Small Sized PMSM Traction Machine

- ◆ Compact PMSM (Permanent Magnet Synchronous Motor) for space saving.
- ♦ Over 30% less power consumption (compared to conventional electric motor).
- ◆ Gearless traction without gear oil for low vibration, low noise and better environmental conservation.




### High Performance Control Systems

A high performance CPU is adopted for control systems. This control system enables to reduce standby electricity, automatic shutoff system for lightings and ventilation to contribute furthermore reduction of electricity.

### Energy Regeneration System OPTIONAL

An energy regeneration device feeds energy back to the power grid while the traction machine is under power generation to achieve high-efficiency energy utilization, which results in over 38% energy conservation (with the assumption of 1050kg, 1.75m/s, 12-hour operation per day, 25 days per month).

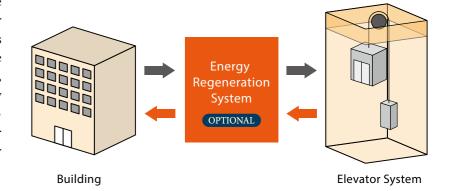


#### Use of Roller Guide OPTIONAL

A roller guide is used instead of a conventional sliding guide shoe. Features include:

- ♦ Comfort: Using the successful vibration damping solution from the high-end elevator type, riding comfort is further improved after roller guide is mounted on the car.
- ♦ High efficiency: Visible improvement of the mechanical efficiency with lower friction and energy consumption.
- ◆ Environmental conservation: Lubrication oil and lubrication unit are eliminated and replaced by a long-life rubber roller to reduce environmental pollution.



The actual product colors may vary slightly from those printed colors in this catalog.

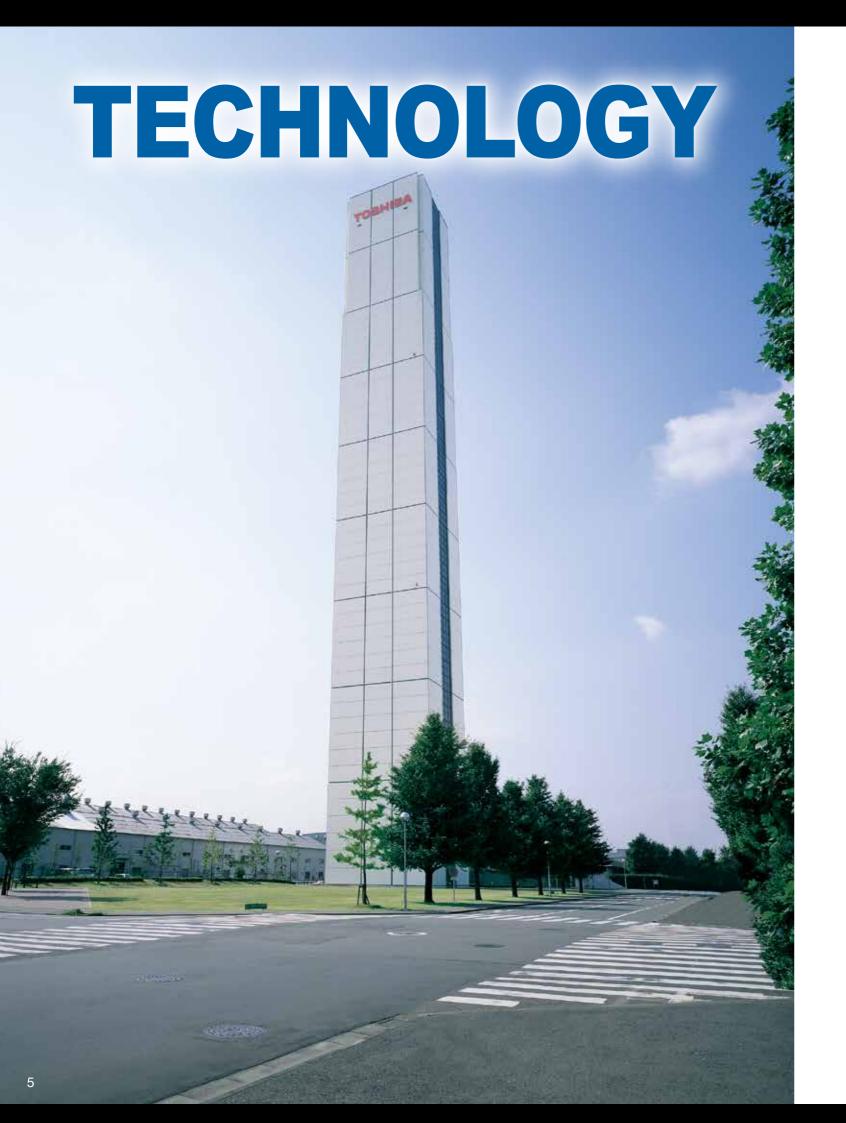

### **Safety Function**

#### **Unintended Car Movement Protection**

A traction drive elevator shall include means to prevent uncontrolled movement of the elevator away from the landing with neither the landing nor the car doors in the locked position. The Elevator shall detect uncontrolled movement of the car away from the landing and stop no more than 1200mm after as measured from the landing floor sill. Before operation, the uncontrolled car movement protection system means for an ascending elevator, the clearance between the landing door floor sill and the apron of the stopped elevator shall not exceed 200mm. In additional, uncontrolled movement protection means the horizontal distance between the sill or entrance frame of the stopped elevator and the wall of the well, from the landing floor sill to 1200mm downward for a descending elevator.

#### Car Door Lock OPTIONAL

Every car door shall be mechanically locked by at least 7mm such that it can only be opened in the unlocking zone of a landing. The lift operation shall automechanically depend on the locking of the car door. This locking shall be proved by an electrical safety device to confirm the horizontal distance between the well wall and the sill or entrance frame of the car is within 150 mm.

#### **Ascending Car Overspeed Protection**


A device to prevent an elevator ascending to the elevator shaft top beyond the rated speed due to a device like an electromagnetic brake or control unit. It monitors the speed of the upper direction mechanically by a governor, then cut off the power supply and safety circuit by an overspeed detecting switch when the speed exceeds the rated speed more than 1.3 times. The elevator shall be stopped by triggering the double brake when overspeed occurred.

#### 2-in-1 door safety

(multi-beam door safety + mechanical door safety) A combination of multi-beam door safety and mechanical door safety.

Full open Full open (Getting off) (Getting on)

\* Image of Multi-beam Door Safety

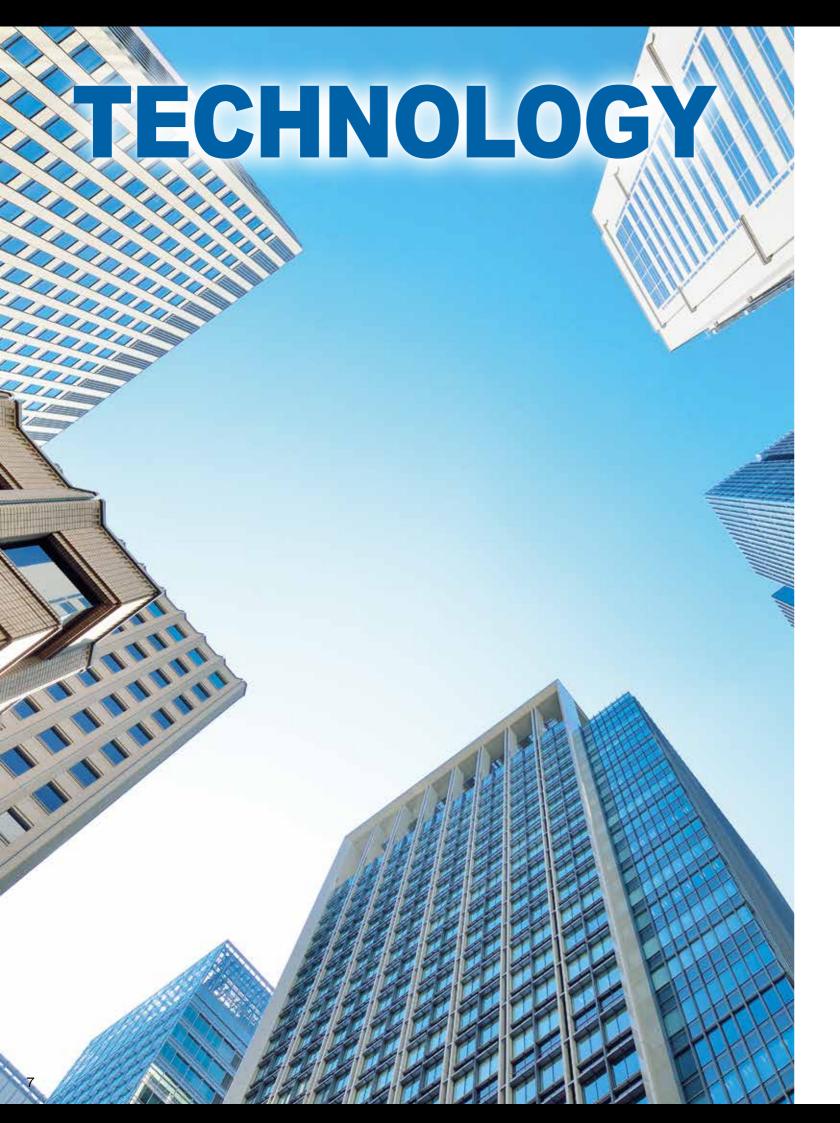

### **Safety Function**

### Automatic Landing in Power Failure

OPTIONAL

In case of a power failure, backup lamps are automatically lighted up in the cars, while the system's operation is switched to the elevator system's own battery powered inverter. Cars stranded between floors are taken to the nearest floor; otherwise, doors are opened and passengers are let out. The doors automatically open in case the car stops at any point that is not between floors but where the doors can be opened. (Note: Overridden by any similar backup or safety systems installed in compliance with safety codes.)

### Earthquake Emergency Operation

OPTIONAL

When the system's seismic sensor installed in the elevator shaft detects an S-wave (the secondary seismic wave and the main shock of an earthquake) that exceeds the pre-set threshold, the system takes control with emergency procedures. "Earthquake" emergency signs lighted up in all cars, all cars are taken immediately to the nearest floor, doors are opened and passengers are instructed to alight.

#### Fire Emergency Operation

OPTIONAL

This emergency operation is automatically triggered in case of a fire, when a fire alarm button is actuated, or when a Fire/Smoke Detector detects an abnormality. All hall calls and floor selections are cancelled, passengers are informed of the emergency procedure with a "Fire" sign and a voice announcement and all cars are sent directly to the emergency exit floor. Doors open at the emergency floor and passengers are guided to safety.

#### Power failure detected.

0

The elevators stop

0

In each car, the "Power Failure" sign lights up and the in-car PA system instructs passengers with the following message: "Please get off this elevator as soon as the doors open."

0

The car goes to the nearest floor, and the doors open.

 $\bigcirc$ 

After a pre-set period, the doors are closed.

0

Normal operation resumes when power supply is back.

 $\ensuremath{\ensuremath{\%}}\xspace Above flow$ chart is representable example

#### Earthquake detected.

A seismic sensor triggers emergency operation

0

In each car, the "Earthquake" emergency sign lights up and the in-car PA system instructs passengers with the following message:

"Please get off this elevator as soon as the

0

The car goes to the nearest floor and the doors open.

Ω

After a pre-set period, the doors are closed.

XAbove flowchart is representable example

#### Fire

0

Fire Alarm is actuated.

In each car, the "Fire" emergency sign lights up and the in-car PA system instructs passengers with the following message:

"Please get off this elevator as soon as the

0

The car goes to the emergency exit floor, the doors open.

0

After a pre-set period, the doors are closed.

X Above flowchart is representable example

## TECHNOLOGY



### **Energy Saving & Environment**

#### Toshiba Group and the SDGs

The main plank of the "Toshiba Group Basic Commitment" is "Committed to people, Committed to the Future." This expresses Toshiba Elevator and Building Systems is unwavering determination to contribute to the development of society through its business, and is consistent with the direction of the SDGs, which aim to realize a sustainable society. Acting in good faith in our daily activities, and with a passion to make the world a better place, looking to the future beyond the next generation, and to create that future with our stakeholders-inspired by these ideas, Toshiba Elevator and Building Systems has and will continue to bring together the creativity and technological capabilities it has cultivated to confront social issues that are becoming more complicated and serious, and to turn on the promise of a new day.

Note: Toshiba Elevator and Building Systems is working on business activities by extracting 11 items that can be promoted from all 17 types of SDGs goals.

### SUSTAINABLE GALS DEVELOPMENT GALS

























#### Products and functions adopted to reduce power consumption


Suppress power consumption by reducing standby power, commercialization of the regenerative power function, adoption of LED lighting.

#### **LED Lightings**

Under equal brightness, an LED lighting system only consumes 10% of electrical with comparison of an incandescent lamp and 50% of an fluorescent lamp. (part of the ceiling)



PRM-1

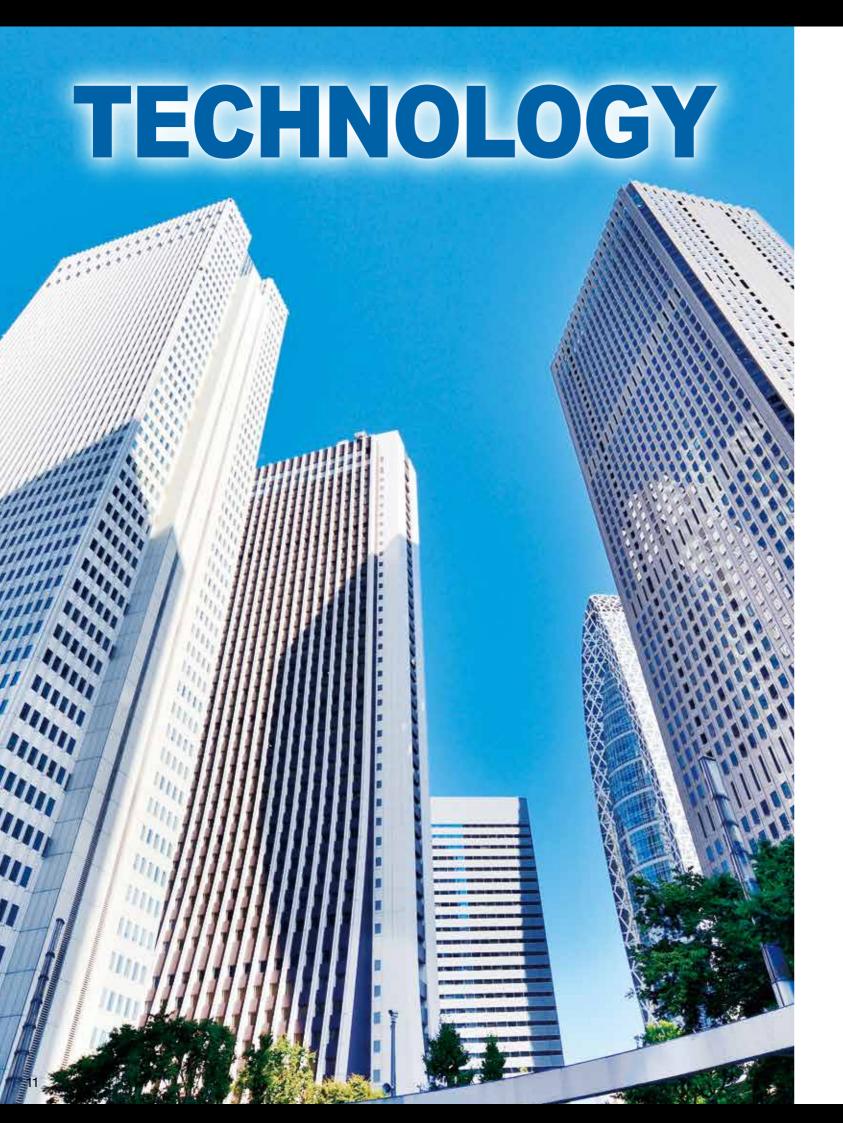

### **Energy Saving & Environment**

#### Providing environmentally conscious products

Toshiba elevator group is promoting the development of environmentally conscious products, which involves environmentally conscious product design, assessing the environmental impact of products and disclosing the environmental performance of products. Products are developed in compliance with the updated voluntary environmental performance standards.

### Product assessment and voluntary environmental standards for products

In developing products, we assess them across their life cycles from manufacturing, logistics and use to disposal and recycling to conduct product development and reduce the environmental impacts on the global environment

Whereas product assessment is used to confirm the minimum necessary environmentally conscious requirements for product development, Voluntary Environmental Standards for Products have been established in the Toshiba elevator group to create highly environmentally friendly products and products complying with the same are released as environmentally conscious products.

#### Reducing hazardous materials

[Reduction of lead use]


By changing the method of tying rope, the use of lead can be eliminated or reduced.

[Employing LED lightings]

By employing LED light, various materials used for light became mercury free.

#### Lead-free Design of Base Plate, RoHS Compliance and Elimination of Specific Chemical Substances (15 Classifications)

Continuous concern over RoHS compliance, eliminating 15 classifications of specific chemical substances and using the lead-free technique for main circuit boards.

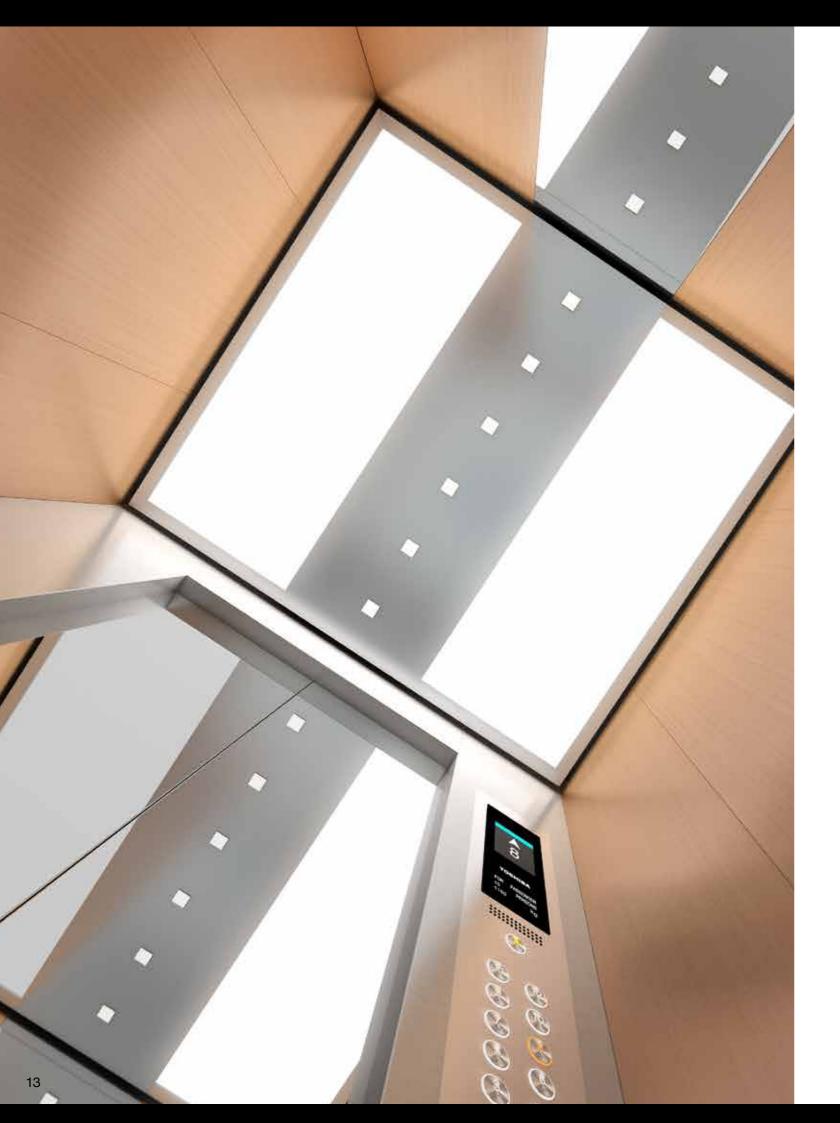

## **Expansion of variations in car ceiling design**

Suitable for harmonization of a wide variety for building applications and concepts.

Expanding the lineup of ceiling designs utilizing LED lighting

All ceiling lighting uses LED lighting to take environmental measures such as long life and energy saving.



## OFFICE

#### OPTIONAL

### PRM-1

Front view



Back view



	PRM-1	
Ceiling design	Light shade (Ceiling entire surface)	
Car side panel (Return panel)	Vibration finish stainless steel	
Car side panel (Side panel)	Black color hairline finish stainless steel and Mirror finish stainless steel	
Car side panel (Rear panel)	Black color hairline finish stainless steel and Mirror finish stainless steel	
Kick plate	Hairline finish stainless steel	
Car door	Black color hairline finish stainless steel	
Car floor	Marble (JQ-1013)	
COP	POP-G1L-104C	
Button	KB-3A	
Indicator	10.4 inch Color LCD	
Remark	Applies to models with a capacity of 1150kg or more.	

### Design variations

The publication of this page is an example of design.

Please refer to the "DESIGN SELECTION" catalog for each the condition and other designs.

PRM-2



TL-S2



OPTIONAL DLC-1



SL-3X



## RESIDENCE

OPTIONAL

### **DLX-27**

Front view



Front side view



DLX-27 Hairline finish stainless steel (Central part: Mirror finish stainless steel)
Hairline finish stainless steel
Hairline finish stainless steel
Hairline finish stainless steel
Nil
Hairline finish stainless steel
Vinyl tile (MID809)
POP-G1NL
GS-6A-BT
LED segment
HCOP-G1D (Button: UB-1)

### Design variations

The publication of this page is an example of design.

Please refer to the "DESIGN SELECTION" catalog for each the condition and other designs.

DLX-25



TL-1



OPTIONAL DLX-21



SL-P1



The actual product colors may vary slightly from those printed colors in this catalog. Please consult our local distributor before adoption about the material and the color.



### DLX-31

Front view



Back view



Ceiling design	DLX-31 Hairline finish stainless steel
Car side panel (Return panel)	Black color mirorr finish stainless steel
Car side panel (Side panel)	Black color mirorr finish stainless steel and Mirror etching finish stainless steel (DZ-008)
Car side panel (Rear panel)	Black color mirorr finish stainless steel and Mirror etching finish stainless steel (DZ-008)
Kick plate	Nil
Car door	Mirror etching finish stainless steel (DZ-008)
Car floor	Marble (JQ-1012)
COP	POP-G1L-57B
Indicator	5.7 inch Color LCD
Handrail	Nil

### Design variations

The publication of this page is an example of design. Please refer to the "DESIGN SELECTION" catalog for each the condition and other designs.

DLX-24





DLC-1



SL-1





OPTIONAL

DLX-22

Front view



Back view



Ceiling design	DLX-22 Hairline finish stainless steel	
Car side panel (Return panel)	Vibration finish stainless steel and Mirror finish stainless steel	
Car side panel (Side panel)	Vibration finish stainless steel and Mirror finish stainless steel	
Car side panel (Rear panel)	Vibration finish stainless steel	
Kick plate	Nil	
Car door	Mirror finish stainless steel	
Car floor	Marble (JQ-1013)	
COP	POP-G1L-57B	
Button	KB-7B	
Indicator	5.7 inch Color LCD	

### Design variations

The publication of this page is an example of design.

Please refer to the "DESIGN SELECTION" catalog for each the condition and other designs.

SL-P1



DLX-28



OPTIONAL DLX-23



OPTIONAL TL-S1





### Hall Decoration Item Variation

The combination of elevator hall equipment and specifications extends design. It can be easily harmonized with the entrance design of the building.













Hall design 6

Hall design 1 OPTIONAL

Hall jamb Wide inclined type

Vibration finish stainless steel Vibration finish stainless steel Hall Transon Hall Door Vibration finish stainless steel

Hall Indicator / HIB-G1L-43B

KB-1A Button HL-G1 Hall Lantern







Note: In the case of jamb with transom, fire-proof specification cannot be applied to the transom.

The actual product colors may vary slightly from those printed colors in this catalog.

### Hall design 2 OPTIONAL

Hall jamb

Wide inclined type Mirror finish stainless steel

Hall Door Mirror etching finish stainless steel (DZ-018)

HI-G34-O **Hall Indicator** Hall Button HB-G1K KB-1B Button









### Hall design 3 OPTIONAL

Hall jamb

Wide inclined type Hairline finish stainless steel

Hall Door Hairline finish stainless steel

Hall Indicator HI-G1 Hall Button HB-G1 Button

Other Hall Emergency Operationg Panel



HB-G1









1 1 A

### Hall design 4 OPTIONAL

Hall Jamb Wide inclined type

Wide inclined type Hairline finish stainless steel

Hall Door Painted steel panel (77GS)

Hall Indicator / Hall Button

HIB-G1NL-O

**Button** GS-7B-B



HIB-G1NL-O





### Hall design 5 OPTIONAL

Hall Jamb Nar

Narow type Hairline finish stainless steel

Hall Door Hairline etching finish stainless steel (DZ-007)

Hall Indicator/ Hall Button


HIB-G1N-O

Button NB-1B



HIB-G1N-O





### Hall design 6 STANDARD

Hall Jamb Narow typ

Narow type Painted steel panel (62YS)

Hall Door Painted steel panel (62YS)

Hall Indicator / Hall Button

/ HIB-G1NL-L-O

**Button** GS-7A-BT







### Hall design 7 OPTIONAL

Hall jamb

Wide inclined type Hairline finish stainless steel

Hall Door

Hairline finish stainless steel

Hall IndicatorHI-G1L-57BHall ButtonHB-G1K







HI-G1L-57B







### Car Operation Panel: G1NL series

※Note: Applicable to Wide Car type models

POP type



SL-P1



FCOP type






#### Button Line-up

GS-5-B	GS-5A-B	GS-5B-B
1		
GS-5-BT	GS-5A-BT	GS-5B-BT
1		
GS-5-W	GS-5A-W	GS-5B-W
GS-5-WT	GS-5A-WT	GS-5B-WT
GS-6-B	GS-6A-B	GS-6B-B
1	1	1
GS-6-BT	GS-6A-BT	GS-6B-BT
1	1	1
GS-6-W	GS-6A-W	GS-6B-W
*		*
GS-6-WT	GS-6A-WT	GS-6B-WT
		7
GS-7-B	GS-7A-B	GS-7B-B
4		4
GS-7-BT	GS-7A-BT	GS-7B-BT
4		4
GS-7-W	GS-7A-W	GS-7B-W
GS-7-WT	GS-7A-WT	GS-7B-WT
		1
UB-3	UB-3A	UB-3B
$\uparrow$	1	$\uparrow$

### Car Operation Panel: G1NS series & Hall Indicator Button: G1NL series

\*Note: Applicable to Wide Car type models


#### POP type

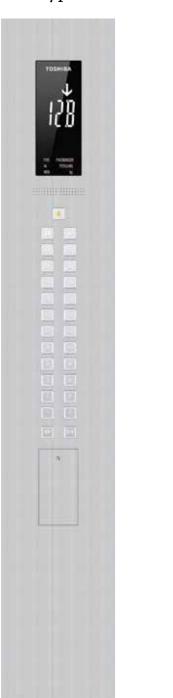

POP-G1NS


OPTIONAL

#### FCOP type

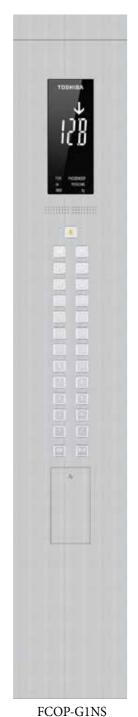

OPTIONAL

#### Button Line-up

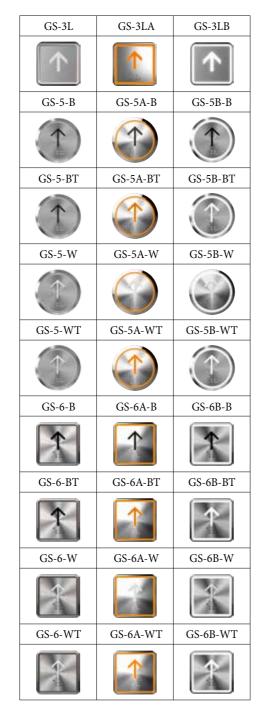

### LED Segment




#### LED Dot Matrix

 $\mbox{\ensuremath{\%}}$  Note: A white color or orange color can also be selected for the LED light.



#### Button Line-up

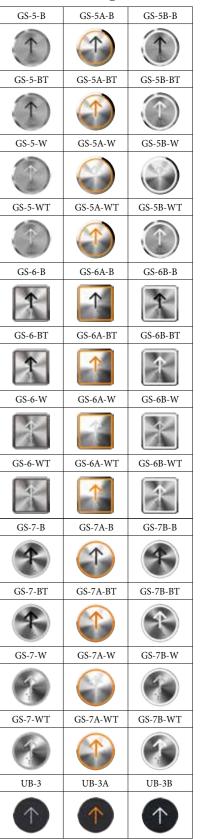

### Car Operation Panel: G1L series

\*Note: Applicable to Wide Car type models

#### POP type



OPTIONAL

POP-G1L-84C POP-G1L-57B POP-G1L-70S POP-G1L OPTIONAL OPTIONAL

### PRM-1



#### FCOP type





FCOP-G1L-57B

FCOP-G1L-70S

FCOP-G1L

FCOP-G1L-104C

1 00

#### **Button Line-up**



KB-8B

KB-8

KB-8A

### Car Operation Panel & Hall Indicator Button: G1N series

 $\ensuremath{\ensuremath{\,\times\,}}$  Note: Applicable to Wide Car type models



COP-G1N OPTIONAL



COP-G1N-70S

#### Button Line-up

NB-1	NB-1A	NB-1B
*	*	1
NB-2	NB-2A	NB-2B
		4



#### HIB type

### LCD Segment




#### Button Line-up

NB-1	NB-1A	NB-1B
*		1
NB-2	NB-2A	NB-2B
		4


### LED Dot Matrix

 $\mbox{\ensuremath{\%}}$  Note: A white color or orange color can also be selected for the LED light.

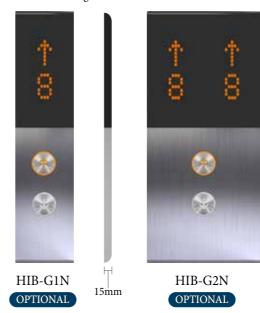

### Car Operation Panel & Hall Indicator Button : G1L · G1K series

\*Note: Applicable to Wide Car type models

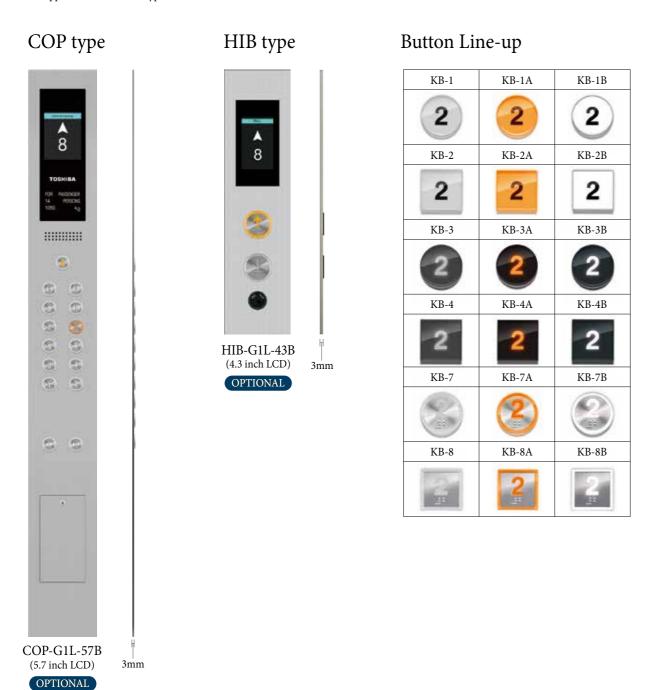






### Car Operation Panel: HCOP series

\*Note: Applicable to Wide Car type models

#### HCOP type



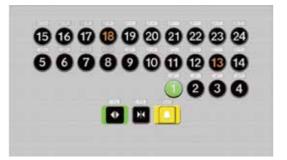

HCOP-G1D OPTIONAL

HCOP-G1D-N OPTIONAL




#### Button Line-up

UB-1	UB-1A	UB-1B
2	2	2
UB-2	UB-2A	UB-2B
2	2	2



HCOP-G1NS-N OPTIONAL

#### Button Line-up

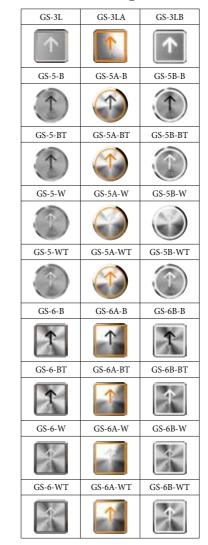



HCOP-G1K-N OPTIONAL

#### Button Line-up

		1
KB-1	KB-1A	KB-1B
2	2	2
KB-2	KB-2A	KB-2B
2	2	2
KB-3	KB-3A	KB-3B
2	2	2
KB-4	KB-4A	KB-4B
2	2	2
KB-7	KB-7A	KB-7B
8	3	2
KB-8	KB-8A	KB-8B
	2	2

### Hall Button OPTIONAL





#### Button Line-up

NB-1	NB-1A	NB-1B
X		4
NB-2	NB-2A	NB-2B
X		4
GS-3L	GS-3LA	GS-3LB
$ \uparrow\rangle$		1

#### Button Line-up

KB-1	KB-1A	KB-1B
2	2	2
KB-2	KB-2A	KB-2B
2	2	2
KB-3	KB-3A	KB-3B
2	2	2
KB-4	KB-4A	KB-4B
2	2	2
KB-7	KB-7A	KB-7B
	3	2
KB-8	KB-8A	KB-8B
<b>E</b>	2	2

### Hall Lantern

#### Hall Lantern OPTIONAL



 $\ensuremath{\mathrm{\%}}$  Note: A white light or orange light can also be selected for the lantern light.









HL-G1-O (Orange light)

HL-G2-W (White light)

HL-G3-O (Orange light)

HL-G4-O (Orange light)

### Hall Indicator

#### Hall Indicator OPTIONAL

LED Dot matrix

\*Note: A white color or orange color can also be selected for the LED light.





HI-G1-O

HI-G34-O

#### LCD Hall Indicator OPTIONAL

5.7 inch Color LCD



With monitoring



Controlled status




### Car Position Indicator

### Large LCD Indicator for Car Operation Panel OPTIONAL


These 10.4 inch and 8.4 inch LCD indicators are capable of displaying in the elevator's various conditions (emergency operations, maintenance status) in large icons and letter in highly visible colors.

#### 10.4 inch Color LCD

#### General car display (Without monitoring)

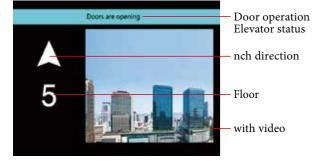

#### 8.4 inch Color LCD



General car display (With monitoring)



A 8

Doors are opening.

A With monitoring



Display under controlled status





#### 5.7 inch Color LCD

General car display





With video

Francisco de academic

Controlled status

LCD Segment







#### LED Dot matrix



### **Functions**

 $\bigcirc$ : STANDARD  $\triangle$ : OPTIONAL

Functions	Notes	Descriptions					
	Simplex selective-collective fully automatic operation	Fully automatic operation by hall and car calls for single car	0				
	Duplex selective collective fully automatic operation (Note 1)	Fully automatic operation for 2 cars in the same group	Δ				
	3 or 4-car group supervisory control system (Note 1)	Fully automatic operation for 3 or 4 cars in the same group					
Operations	Group supervisory control system	For supervisory operation of groups of more than 4 cars, please contact us					
	FLOORNAVI	Destination Control System					
	Independent operation	Lift car separated from group control operation and responde to car call only	Δ				
	Attendant operation	Operation by attendant by switch & button provided at service cabinet in COP	Δ				
	Automatic landing function when system fails	When system failure occurs, the lift will automatically land at the nearest floor and the door will open for passengers to exit	0				
	Automatic withdrawn from group control	If an elevator under a group supervisory operation fails to run for some reason, the elevator is cut out of the group and the other elevators automatically back up the faulty one to continue the group supervisory operation.	0				
	Car inspection operation [INS]	During car inspection operation, the lift car will run at slowly speed without responding to hall call					
	Overload protection	The car overload buzzer will sound to prevent overloading and the doors will remain open					
	Fireman's operation (Note 2)	In the event of fire, when the Fireman's switch is activated, the designated lift will be ready for firemen to use	Δ				
	Fire emergency operation	In the event of fire, all lifts will return to the designated floor and stop operation to allow passengers to exit					
Safety	Emergency operation indication at COP	In the event of an emergency, the emergency operation status will be displayed at COP					
Functions	Power failure emergency operation	In the event of power failure, all lifts will return to the designated floor by emergency power supply from the building to allow passengers to exit					
	Automatic landing during power failure [TOSLANDER]	In the event of power failure, the lift will land at the nearest floor by emergency battery	Δ				
	Earthquake emergency operation	In the event of an earthquake, the elevator will detect the seismic signal and land at the nearest floor	Δ				
	In-car emergency lamp [Self-charging]	In the event of power failure, the in-car emergency lamp will be activated	0				
	Emergency call button	A button for passenger to make an emergency call when they are trapped inside the lift	0				
	Door open when lift car is overloaded	The doors will re-open when over load is detected, even during the closing of doors.	0				
	2 in 1 door safety [Multi-beam door safety + Mechanical door safety]	A combination of multi-beam door safety and mechanical door safety	0				
	Home landing	To reduce passenger waiting time, the lift will return to the designated floor and stand by	Δ				
Service Functions	Service floor cut-off selection [Software interface]	This is of the free setting type, where the elevator superintendent for every building is free to set and modify service cutt-off floors even after in use. This is the most appropriate type for such office buildings as their tenants are not yet fixed before complection.					

- Notes

  1: Not applicable to lift car with through door.


  2: Fire emergency operation and fireman service cannnot be applied simultaneously.

  3: Standard function for 2-car operation or 3-car operation.


  4: Car load is less than 150kg and there are five or more registered car calls.

 $\bigcirc$ : STANDARD  $\triangle$ : OPTIONAL

Functions	Notes	Descriptions						
	Service floor cut-off selection [Manual]	linstalling a switch or a timer on the supervisory panel, disables registration of car calls or hall calls for a basement floor's or an intermediate floors or intermediate floors thus engaging in non-stop (bypass) without servicing there.						
	Full car bypass (Note 3)	When the lift car is full, the lift will bypass all hall calls and go straight to the designated floor	0					
	Car call cancellation	The floor call can be cancelled from the COP by pressing the floor button twice within 3 second	0					
	Nuisance call cancellation (Note 4)	Incorrect or nuisance floor calls can be cancelled to eliminate unnecessary operation	0					
	Door repeated opening	When an obstacle is detected, the door will repeatedly open and close until the obstacle is removed	0					
	Car indicator	Car indicator with the car operating panel	0					
	Adjustable door opening time	Adjusts the door opening time to reflect building usage	0					
	Door open extension button	Extends the door opening time	Δ					
	Car chime	A chime installed in the car ceiling will sound when the lift arrives	Δ					
	Hall chime	A chime installed in the lift lobby will sound when the lift arrives	Δ					
	Car full load indicator	"Full Load" will display on the hall indicator when the lift car is full						
	Hall lantern	The hall lantern will light up when the lift arrived						
Service Functions	Sub car operating panel	Additional car operating panel						
Tanoaono	Out of service indicator	"Out of Service" will display on the hall indicator when the lift car is faulty						
	Parking operation [Manual]	Parks the lift at designated floor by key-switch	0					
	Parking operation [Automatic]	Parks the lift at designated floor auotmatically						
	Car lighting automatic cut-off	When the lift is not in operation after a pre-determined period of time, the car light will turn off automatically	0					
	Ventilation fan automatic cut-off	When the lift is not in operation after a pre-determined period of time, the ventilation fan will turn off automatically	0					
	Door Open button lamp [For automatically cut-off car lighting]	The "Door Open" button will remain lit when the lift car light is turned off automatically	0					
	Nuisance call cancellation at reversal	Cancel intentionally registered nuisance calls automatically in the reversal travel direction	0					
	Multi-channel intercom	The intercom system can communicate with multi-stations simultaneously	0					
	Designated floor stop operation	Automatically stops the lift at the designated floor for crime prevention purposes	$\triangle$					
	Card access system	Allows activation of the disnated floor call by IC card	$\triangle$					
	Speech synthesizer	Announces car operations	Δ					
	Supervisory panel	Located in the building control room, etc. to monitor the status and control of each lift	Δ					

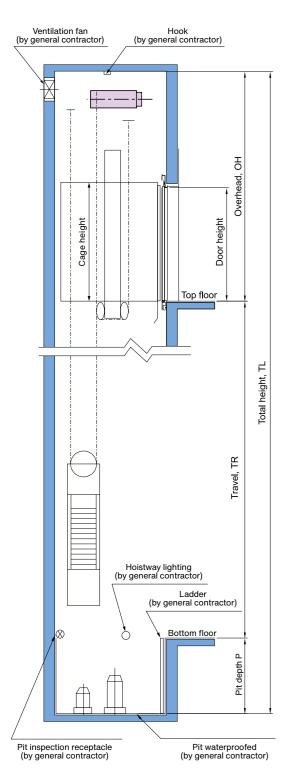

Traction machine Control panel/ Top floor hoistway plan

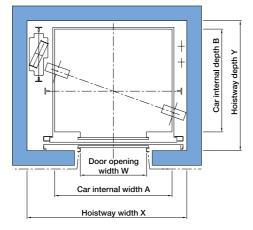

Typical floor hoistway plan (W, D)


Hoistway section

### **Specifications**

Туре		Nos.of Person	Capacity (kg)	Speed	Cage s Internal(			ntrance nm)	C/W	Hoistway	v size(m	m)	Max. Service	Max. Travel				
- 1		Person	(kg)	(m/s)	A×B	Height	Width	Height		X×Y	ОН	Р	Stops(s)					
P8-CO60	w			1			800 900			2190×1670 2290×1670	3900	1600		80				
P8-CO96	w			1.6			800			2190×1670	4050	1700						
1 0-0030	**			1.0			900			2290×1670	1000	.,,,,						
P8-CO105	w	8	630	1.75	1400×1100	2300	800	2100	Side	2190×1670	4100	1750	40					
		_								2500	900	2.00		2290×1670			"	100
P8-CO120	w			2			800			2190×1670	4200	1800						
							900			2290×1670								
P8-CO150	w			2.5			800			2190×1670	4420	2250						
							900			2290×1670								
P11-C060	w			1			800			2200×1780	3900	1600		80				
							900			2300×1780			-					
P11-C096	w			1.6			800 900			2200×1780 2300×1780	4050	1700						
						2300		2100	Side	2300×1780 2200×1780	4100		40	100				
P11-C0105	w	11	825	1.75	1400×1350		800 900			2200×1780 2300×1780		1750						
				2			800			2200×1780								
P11-CO120	W						900			2300×1780	4200	1800						
							800			2200×1780	4420		1					
P11-CO150	W			2.5			900			2300×1780		4420   2250						
							900			2400×1800								
P13-C060	w			1			1000			2500×1800	3900	1600		80				
				•			1100			2600×1800								
							900			2400×1800			1					
P13-CO96	w			1.6		, †	1000			2500×1800	4050	1700						
							1100			2600×1800	1							
							900			2400×1800			1					
P13-CO105	w	13	1000	1.75	1600×1400	2300	1000	2100	Side	2500×1800	4100	1750	40					
							1100			2600×1800	1			100				
		w			]		900			2400×1800				100				
P13-CO120	W			2		ļ	1000			2500×1800	4200	1800						
							1100			2600×1800								
		┦					900			2400×1800			]					
P13-CO150	W			2.5			1000			2500×1800	4420	2250	)					
							1100			2600×1800								


W: Wide car

- The above table complies with EN81-20/50 standards.
- Please contact to our local distributor to check for other standards.
- In case of travel is 40m or more, add 150mm to OH dimension and TC dimension at the above-stated dimension.
- Hoistway dimensions take into account the error of up to 50 mm after the construction work.
- The hoistway dimensions in chart are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables which is not relevant to elevator are prohibited inside the hoistway.
- OH value in the chart is for standard ceiling. As for the non-standard cars, please consult our local distributor.
  If the size of the hoistway is greater than the above sizes, OH will be larger. Please consult our local distributor.
- If the location of Power source panel, Control panel and Electric power supply are changed. Please consult our local distributor.

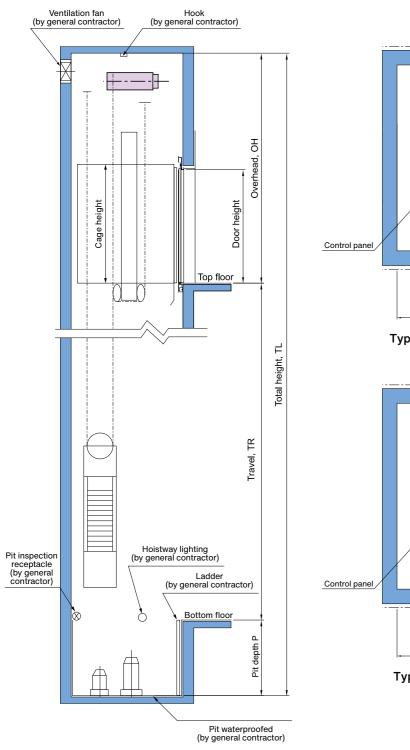

Door opening Car internal width A Hoistway width X

Typical floor hoistway plan (D2)

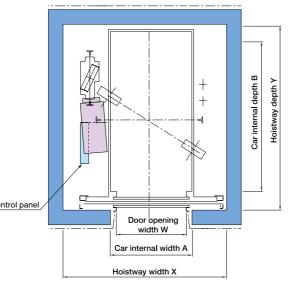

Typical floor hoistway plan (D)

Hoistway section

### **Specifications**

Туре		Nos.of	Capacity	Speed	Cage s Internal(	size mm)		ntrance m)	C/W	Hoistway	size(m	m)	Max. Service	Max. Travel	
		Person	(kg)	(m/s)	A×B	Height	Width	Height		X×Y	ОН	Р	Stops(s)		
D0 0000	_			_			800			1990×1760	3900	1600		80	
P8-CO60	D			1			900			2140×1760	3900	1000		00	
P8-CO96	D			1.6			800		2100 Side	1990×1760	4050	1700			
1 0-0030				1.0			900			2140×1760	4000	1700			
P8-CO105	D	8	630	1.75	1100×1400	2300	800	2100		1990×1760	4100	1750	40		
		0	000	•	1100**1400	2000	900	2100	Oluc	2140×1760			"	100	
P8-CO120	D			2			800			1990×1760	4200	1800			
	$\dashv$				-		900 800			2140×1760 1990×1760			-		
P8-CO150	D			2.5			900			2140×1760	4420	2250			
							800			2000×2060					
	D						900			2140×2060			40		
P11-C060	-			1			800			2000×2170	3900	1600		80	
	D2						900			2140×2170			*		
	_						800			2000×2060					
D44 COOC	D						900	900			2140×2060	40=0	4700	40	
P11-CO96	- DO			1.6			800			2000×2170	4050	1700	*		
	D2						900			2140×2170	1_		**		
	D						800			2000×2060	4100	1750	40	100	
P11-CO105		11	11 825	1.75	1100×1700	2300	900	2100	Side	2140×2060			40		
1 11 00 100	D2						800	2100	Oldo	2000×2170			*		
							900			2140×2170			~~		
	D					800			2000×2060			40	100		
P11-CO120				2			900			2140×2060	4200	1800			
	D2						800			2000×2170			*		
	-						-		900 800			2140×2170 2000×2060			
	D			2.5		-	900			2140×2060	4420		40		
P11-CO150	-	-					800			2000×2170		2250	*		
	D2						900			2140×2170					
							800				2000×2460				
D44 0000	D						900			2140×2460			40		
P14-C060				1		, †	800			2000×2570	3900	1600		80	
	D2						900			2140×2570			*		
	D						800			2000×2460			40		
P14-CO96				1.6			900			2140×2460	4050	1700	40		
	D2			1.0			800			2000×2570	1000	1700	*		
							900			2140×2570					
	D						800			2000×2460			40		
P14-CO105		14	1050	1.75	1100×2100	2300	900 800	2100	Side	2140×2460	4100	1750			
	D2						900			2000×2570 2140×2570			*		
	$\dashv$				-		800			2000×2460				100	
	D						900			2140×2460			40		
P14-CO120	$\dashv$			2			800			2000×2570	4200	1800			
	D2				}	900			2140×2570			*			
				2.5	1		800	-		2000×2460			40		
P14-CO150	D						900			2140×2460	4400	2050	40		
F 14-CU 150							800			2000×2570	4420	2250	*		
	D2						900			2140×2570			**		

- The above table complies with EN81-20/50 standards.
- Please contact to our local distributor to check for other standards.
- In case of travel is 40m or more, add 150mm to OH dimension and TC dimension at the above-stated dimension.
- Hoistway dimensions take into account the error of up to 50 mm after the construction work.
- The hoistway dimensions in chart are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables which is not relevant to elevator are prohibited inside the hoistway.

- OH value in the chart is for standard ceiling. As for the non-standard cars, please consult our local distributor.
  If the size of the hoistway is greater than the above sizes, OH will be larger. Please consult our local distributor.
  If the location of Power source panel, Control panel and Electric power supply are changed. Please consult our local distributor.

### Hook (by general contractor) Traction machine Control panel Door opening Car internal width A Hoistway width X Top floor hoistway plan 460 Hoistway lighting (by general contractor) Ladder (by general contractor) Pit inspection receptacle (by general contractor) B-B A-A Pit waterproofed (by general contractor) Hoistway section Door opening Car internal width A Hoistway width X

Typical floor hoistway plan

### **Specifications**

Туре		Nos.of Person	Capacity	Speed	Cage s Internal(			ntrance nm)	C/W	Hoistway	v size(m	m)	Max. Service	Max. Travel
		Person	(kg)		A×B	Height	Width	Height		X×Y	ОН	Р	Stops(s)	
P15-CO60	w			4			1000			2450×2170	4700	4200		00
P 15-CO60	VV			1			1100			2550×2170	4700	1380		80
P15-CO96	w			4.6		1000			2450×2170	4850	1450	]		
F 15-CO90	VV			1.6			1100			2550×2170	4000	1450	]	
P15-CO105	١٨/			1.75			1000			2450×2170	4950	1480		100
1 10-00100	**	15	1150	1.75	1800×1500	2300	1100	2100	Rear	2550×2170	4550	1400	48	
P15-CO120	w	.0	1.00	2	1000 1000	2000	1000		1100.	2450×2170	5000	1600	"0	.00
1 10 00 120							1100			2550×2170	0000	1000		
P15-CO150	w			2.5			1000			2450×2170	5300	2000		
. 10 00 100	L			2.0			1100			2550×2170				
P15-CO180	w			3			1000			2600×2170	5750	2500		150
. 10 00 100	L.,						1100			2700×2170				
P18-C060	W			1							4700	1380		80
P18-CO96	W			1.6					Rear		4850	1450		
P18-CO105	_	18	1350	1.75	2000×1500	2300	1100	2100		2650×2170	4950	1480	48	100
P18-CO120	-			2			1.00				5000	1600		
P18-CO150	W			2.5							5300	2000		
P18-CO180	W			3						2800×2170	5750	2500		150
P21-CO60	w			1			1100	.		2700×2370	4700	1380		80
						1200			2750×2370			-		
P21-CO96	w			1.6			1100	2100		2700×2370	4850	1450		
						2300	1200		Rear	2750×2370				100
P21-CO105	w			1.75			1100			2700×2370	4950	1480	48	
	$\vdash$	21	1600		2000×1700		1200 1100			2750×2370 2700×2370		-		
P21-CO120	W			2			1200	-		2750×2370	5000	1600		
	$\vdash$						1100	+		2700×2370 2700×2370				
P21-CO150	W			2.5			1200			2750×2370	5300	2000		
							1100	+		2850×2370			1	
P21-CO180	W			3			1200	-		2900×2370	5750	2500		150
P24-C060	w			1			1200			2300-2370	4700	1380		80
P24-CO96	W			1.6							4850	1450	1 1	- 00
P24-CO105				1.75						2800×2420	4950	1480	1	
P24-CO120	-	24	1800	2	2100×1750	2300	1200	2100	Rear		5000	1600	48	100
P24-CO150	w			2.5							5300	2000		
P24-CO180	W			3						2950×2420	5750	2500	1 1	150
P26-C060	W			1							4700	1380		80
P26-CO96	W			1.6						0000, 0005	4850	1450	48	
P26-CO105	W	26	0000	1.75	5		4000	2400	D	2800×2620	4950	1480		400
P26-CO120	W		2000	2 210	2100×1950	2300	1200	2100	Rear		5000	1600		100
P26-CO150	W		-	2.5	1	.				2052-2052	5300	2000		
P26-CO180	W			3						2950×2620	5750	2500	]	150


W: Wide car

#### Note:


- The above table complies with EN81-20/50 standards.
- Please contact to our local distributor to check for other standards.
- In case of travel is 40m or more, add 150mm to OH dimension and TC dimension at the above-stated dimension.
- Hoistway dimensions take into account the error of up to 50 mm after the construction work.
- The hoistway dimensions in chart are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables which is not relevant to elevator are prohibited inside the hoistway.
- OH value in the chart is for standard ceiling. As for the non-standard cars, please consult our local distributor.

  If the pine of the heighbory is greater than the chart sizes. OH will be larger. Please consult our local distributor.
- If the size of the hoistway is greater than the above sizes, OH will be larger. Please consult our local distributor.
  If the location of Power source panel, Control panel and Electric power supply are changed. Please consult our local distributor.


# Hook (by general contractor) Ladder (by general contractor) Bottom floor Hoistway section

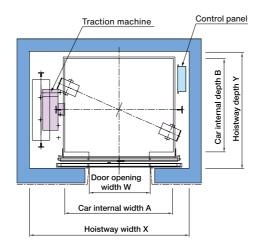

Typical floor hoistway plan (W)

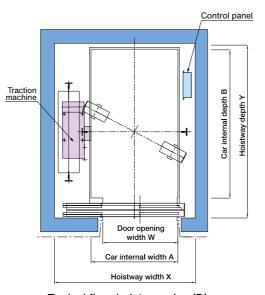

Typical floor hoistway plan (D)

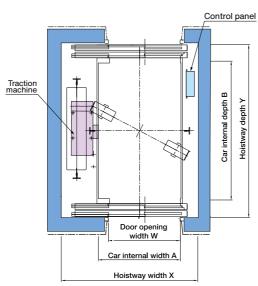

Typical floor hoistway plan (D2)

### **Specifications**

Туре		Nos.of	Capacity	Speed	Cage s Internal(			ntrance m)	C/W	Hoistway	/ size(m	m)	Max.	Max.														
Турс		Person	(kg)	(m/s)	A×B	Height	Width	Height	C/VV	X×Y	ОН	Р	Service Stops(s)	Travel (m)														
P15-CO60	w			1			1000			2750×1870	4350	1350		80														
1 10 0000	**			_ '			1100			2850×1870	4550	1330		00														
P15-CO96	w			1.6			1000			2750×1870	4500	1450																
							1100			2850×1870		1.00																
P15-CO105	W			1.75			1000			2750×1870	4550	1500																
		15	1150		1800×1500	2300	1100	2100	Side	2850×1870			48	100														
P15-CO120	w			2			1000 1100			2750×1870 2850×1870	4650	1900																
									1000			2750×1870			1													
P15-CO150	W			2.5			1100			2850×1870	4900	2100																
							1000			2900×1870			1 1															
P15-CO180	W			3			1100			3000×1870	5300	2900		150														
P17-CO60	W			1							4350	1350		80														
P17-CO96	W			1.6							4500	1450	]															
P17-CO105	W	17	1275	1.75	2000×1400	2300	1100	2100	Side	2950×1830	4550	1500	48	100														
P17-CO120	W	17   12/5	17 1275	2	2000^1400	2300	1100	2100	Side		4650	1900	40	100														
P17-CO150	W			2.5							4900	2100	]															
P17-CO180	W			3						3100×1830	5300	2900		150														
P18-CO60	W			1							4350	1350		80														
P18-CO96	W			1.6							4500	1450																
P18-CO105	W	18	1350	1.75	2000×1500	2300	1100	2100	Side	2950×1870	4550	1500	48	100														
P18-CO120	W			2							4650	1900	"															
P18-CO150	W			2.5						2400-4070	4900	2100	-	450														
P18-CO180	W			3			4400			3100×1870	5300	2900		150														
P21-CO60	w			1			1100			2980×2110	4350	1400		80														
							1200			3080×2110 2980×2110		-	1 1															
P21-CO96	w			1.6			1100 1200			2980×2110 3080×2110	4500	1500																
							1100			2980×2110			1															
P21-CO105	W			1.75			1200			3080×2110	4550	1550																
		21	1600		2000×1700	2300	1100	2100	Side	2980×2110			48	100														
P21-CO120	W			2			1200			3080×2110	4650	1700		100														
							1100			2980×2110			1															
P21-CO150	W			2.5			1200			3080×2110	4900	2150																
							1100			3130×2110			1															
P21-CO180	W			3			1200			3230×2110	5300	2900		150														
P24-CO60	w			1							4350	1400		80														
P24-CO96	w			1.6							4500	1500	1 1															
P24-CO105	W	24	1800	1.75	2100×1750	2300	1200	2100	Side	3030×2130	4550	1550	48	100														
P24-CO120	W	24	1000	2	2100*1750	2300	1200	2100	Side		4650	1700	40	100														
P24-CO150	W			1														2.5							4900	2150	]	
P24-CO180	W			3						3180×2130	5300	2900		150														
P26-CO60	W			1							4350	1400		80														
P26-CO96	W			1.6							4500	1500	]															
P26-CO105	W	26 200	26	26	26	26	26	26	26	26	26	2000	2000	26 2000	2000	1.75	2100×1950	2300	1200	2100	Side	3030×2310	4550	1550	48	100		
P26-CO120	W									2000	2000			2	2100**1000	2000	1200	2100	Oldo		4650	1700	] **	100				
P26-CO150	W													1	1	2.5							4900	2150	1			
P26-CO180	W			3						3180×2310	5300	2900		150														
P17-2S60	D			1							4350	1350		80														
P17-2S96	D			1.6						04000700	4500	1450	- 1															
P17-2S105	D			1.75						2180×2760	4550	1500	48	100														
P17-2S120	D			2							4650	1900	- 1															
P17-2S150 P17-2S180	D D			2.5						2330×2760	4900 5300	2100	1 1	150														
P17-2S160	D2	17	1275	1	1200×2300	2300	1100	2100	Side	2330^2700	4350	2900 1350		80														
P17-2S96	D2			1.6							4500	1450	1 1	00														
P17-2S105	D2			1.75						2380×2860	4550	1500	1															
P17-2S120	D2			2						2000-2000	4650	1900	*	100														
P17-2S150	D2			2.5							4900	2100	1															
P17-2S180	D2			3						2530×2860	5300	2900	1 1	150														
P21-2S60	D			1						2000 2000	4350	1400		80														
P21-2S96	D			1.6							4500	1500	1 1															
P21-2S105	D			1.75						0000 0000	4550	1550	1 ,															
P21-2S120	D			2	1					2380×3070	4650	1700	48	100														
P21-2S150	D			2.5	1						4900	2150	1															
P21-2S180	D	24	1000	3	1400::0400	2200	1200	2400	6:4-		5300	2900	1 1	150														
P21-2S60	D2	21	1600	1	1400×2400	2300	1200	2100	Side		4350	1400		80														
P21-2S96	D2			1.6							4500	1500	1 1															
P21-2S105	D2			1.75						2180×2970	4550	1550	*	100														
P21-2S120	D2			2							4650	1700		100														
P21-2S150	D2			2.5							4900	2150	]															
	D2	1		3						2330×2970	5300	2900	1	150														
P21-2S180	UZ																											

W: Wide car D: Deep car D2: Front and rear opening door X: Please consult our local distributor

- The above table complies with EN81-20/50 standards.
- Please contact to our local distributor to check for other standards.
- In case of travel is 40m or more, add 150mm to OH dimension and TC dimension at the above-stated dimension.
- Hoistway dimensions take into account the error of up to 50 mm after the construction work.
   The hoistway dimensions in chart are the minimum requirement.
- The hoistway structure wall must be 150mm thick or more.
- Piping, wiring and cables which is not relevant to elevator are prohibited inside the hoistway.
- OH value in the chart is for standard ceiling. As for the non-standard cars, please consult our local distributor.
   If the size of the hoistway is greater than the above sizes, OH will be larger. Please consult our local distributor.
- If the location of Power source panel, Control panel and Electric power supply are changed. Please consult our local distributor.

58

### **Works by Others**

Works below are not included in elevator installation works:

#### **►** Hoistways

- 1. Hoistway construction and fire-proofing, and opening for jambs, indicators and push-buttons, etc.

  Please note that chipping or padding work is required according to the necessity, in case the error of the structure is 30 mm or over.
- 2. Installation of separating beams, intermediate beam, back beam and lateral beams (if necessary).
- 3. Installation of the base plate for each floor and of bed steel for furnishing the equipment related to landing entrance, in case of hoistways of steel structure of PC structure.
- 4. Fire-proofing of steel frame material in steel structured hoistways, and fire-proofing around landing entrances (if necessary).
- 5. Finishing of walls and floors, etc., around entrances, after furnishing equipment related to landing entrances.
- 6. Furnishing of base steel or others for furnishing rail brackets, especially where the floor height is high (if necessary).
- 7. Installation of the entrance or the gangway for pit inspection (if necessary).
- 8. Water-proofing of the pit (including drainage if necessary).
- 9. Rearrangement of the building body in case that there are some spaces to be used under the pit.
- 10. Installation of emergency exits for rescue purposes in the event there are floors at which the elevator does not stop and installation of a fascia plate.
- 11. Shelter equipment from rain at landing entrances directly contacting to the air in the place like roof.
- 12. Installation of hooks or beams on top of the elevator shaft.
- 13. Installation of lighting in hoistway (if necessary).
- 14. Installation of vent opening at the top of shaft (if necessary).
- 15. Installation of a net or wall to prevent falling into the pit (in cases where the pit level is different.)
- 16. All related to the building structure other than works above.

#### **►** Works for Equipment

- 1. Wiring of the power supply for motors and that for lighting equipment, and of grounding to power source panels of elevators in the Elevator shaft.
- 2. Wiring of the power supply to the supervisory panels.
- 3. Piping and wiring of intercoms outside hoistway and of others necessary for elevators.
- 4. Supply and installation of switching devices for emergency power supply in case of power failure and two pairs of relay contacts for normal / emergency power identification, and their piping and wiring (if necessary).
- 5. Piping and wiring of supervisory panels, alarm panels and inter-communication systems, etc., outside hoistways.
- 6. Furnishing of receptacles for inspection in pits.

#### **► Temporary Works**

It is required to arrange the following matters:

- 1. To secure the site office for installation work and the stock yard for materials without charge.
- 2. Enclosure to be used during the installation work.
- 3. Supply of electric power for installation work and the trial operation for adjustment.
- 4. Security of enough passage for carrying heavy goods.
- 5. On use of elevator for the construction work of the building, It is required to make contract with a separate written estimate.

#### Note

During equipment planning of elevators, please take the following items into

- 1. Provide power facility so that voltage regulation of the power supply at the receiving terminals in the hoistway is kept within  $\pm 10\%$  for the motor, and  $\pm 2\%$  for the lighting equipments.
- 2. In the hoistways, please prevert the temperature from exceeding 40 °C and humidity from exceeding 90% (monthly mean) and 95% (daily mean).
- 3. Please do not allow any chemically toxic gas or an excessive amount of dust to enter into the hoistways, as these can corrode the metal or electrical contacts.

When asking for an estimate, please inform us of the following:

- 1. Building name and address.
- 2. Desired type and number of set.
- 3. Number of stops.
- 4. Floor height.
- 5. Voltage and frequency of main power supply.
- 6. Desired completion date.

### Memo

### **Global Network**

Head office / Manufacturing base Head office

A TOSHIBA ELEVATOR AND BUILDING SYSTEMS CORPORATION

Head Office: 72-34, Horikawa-cho, Saiwai-ku, Kawasaki 212-8585, Japan Factory: 1 Toshiba-cho, Fuchu City, Tokyo 183-8511

- B TOSHIBA ELEVATOR (SHENYANG) CO., LTD. Head Office: No.5 Feiyun Road Hunnan New District Shenyang, The People's Republic of China
- TOSHIBA ELEVATOR (CHINA) CO., LTD. Head Office: No. 685 Wen Chuan Road, Baoshan District, Shanghai 201901, The People's Republic of China.
- CHEVALIER (HK) LIMITED Head Office: 22nd Floor, Chevalier Commercial Centre, 8 Wang Hoi Road, Kowloon Bay, Hong Kong
- CHEVALIER SINGAPORE HOLDINGS PTE. LTD.
  Head Office: 23 Genting Road #07-01/02 Chevalier House,
  Singapore 349481

61

TOSHIBA ELEVATOR (MALAYSIA) SDN. BHD.

Head Office: Wisma TMEL, No.15, Jln Kuchai Maju 4, Kuchai Entrepreneurs' Park, Off Jalan Kuchai Lama, 58200 Kuala Lumpur, Malaysia.

G TOSHIBA ELEVATOR MANUFACTURING ASIA SDN. BHD.

Head Office: 2530, Lorong Perusahaan 10 Prai Industrial Estate Prai 13600 Pulau Pinang, Malaysia

- TOSHIBA JOHNSON ELEVATORS (INDIA) PVT. LTD. Head Office: 602, 6th Floor, C&B Square, Sangan Complex 127, Andheri Kurla Road. Andheri (East), Mumbai,
- TOSHIBA ELEVATOR MIDDLE EAST (L.L.C.) Head Office: P. O. Box 16733, Dubai, UAE

400059 India

Toshiba Elevator (Vietnam) Limited Liability Company Head Office: No. 36, Street 96, Quarter 2, Thanh My Loi Ward, Thu Duc City, Ho Chi Minh City, Vietnam

Together with our global partners, we connect with Asia and then the world, through our technology and our spirit.

This planet is our shared heritage. We must live together, grow together and delight in one another.

[For more information]

#### **Toshiba Elevator and Building Systems Corporation**

Head office: 72-34, Horikawa-cho, Saiwai-ku, Kawasaki 212-8585, Japan

https://www.toshiba-elevator.co.jp/elv/infoeng/

